

HanleyLED

FLEX STRIP

Low-profile LED light tape solution for illuminating interior, linear, or shallow applications

12
VDC



Flex Strip Series

Specifications

SKU	High Brightness.....HFLX-HB60WPURE
	Standard Brightness.....HFLX-SB60WPURE
Beam angle	115°
Power (W).....	3.2 ft6 W
	16.4 ft.....25 W
Color temperature	6500 K
Lumens	420 lm/W
Length	16.4 ft
Environment	IP20
Operating temp.	-25° C to +60° C
Storage temp.	-25° C to +70° C
Packaging	Anti-static bag
Warranty	5-Year Product



Can be cut at pre-marked soldering points


Easy installation: wires pre-soldered and double-sided 3M™ tape for application



Power Supply Options

Product	35 W	60 W	100 W	120 W	150 W	240 W
Flex Strip	16.4 ft	32.8 ft	52.4 ft	65.6 ft	82.0 ft	131.2 ft

Dimensions

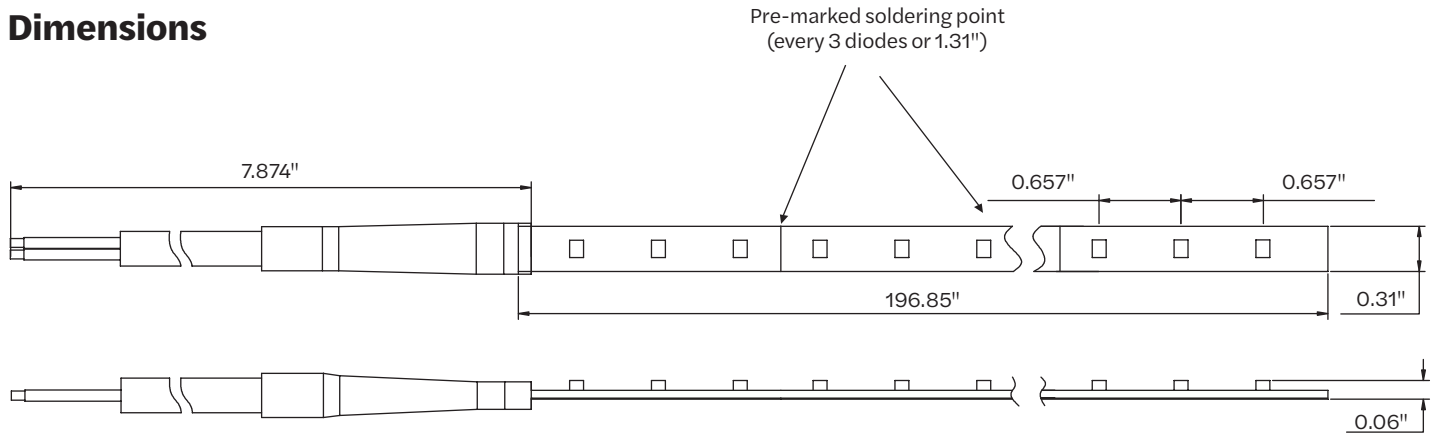

principal Sloan.com
 325.227.4577
 3490 Venture Dr., San Angelo, TX 76905

