

FLEXIBRITE SIDE-BEND G2

Flexible LED illumination


FlexiBRITE
Series

Specifications

Dimensions L x W x H 24' x 0.43" x 0.89"

Input 24 V

Min. bend radius 2.36"

Power 3.66W/ft

Operating temperature -40° C to +65° C

Environment IP67

Power supply 24V

Run footage Max. 24'

Connection wire Available every 9.84"

Warranty 5-year Product / 5-year Labor

Multiple applications including:

- Neon tube light source
- Building and sign outline lighting
- General and cove lighting



Dual-color
silicone
extrusion

UV-resistant

New and improved design
features convenient
connection wires for
faster, easier installation

Bends
side-to-side with
2.36" radius

Product Options


Length	CCT/color	Jacket color	Lm/ft	Cut section length	Assemblies/100W PS	W/assembly	Part number
24-ft	6500 K	White	200	0.33"	1	87.7	M-SW024-65
	5000 K						M-SW024-50
	4000 K						M-SW024-40
	Red (630 nm)	Red	14				M-SW024-RD
	Orange (608 nm)	Orange	33				M-SW024-OR
	Yellow (630 nm)	Yellow	76				M-SW024-YL
	Green (522 nm)	Green	40				M-SW024-GR
	Blue (468 nm)	Blue	12				M-SW024-BL



IMPORTANT WARRANTY INFO



NOTE: The LED neon itself and all its components may not be mechanically stressed. Please ensure that the power supply is adequate to operate the total load. Only qualified personnel should be allowed to perform installations. The design of the housing should be according to the IP standards in the application. If surge protection structure not within power supplier, a lightning protector should be needed additionally. Before cutting and sealing, please read the user manual, and please ensure you have read and fully understand it. Please do not twist the product and do not bend it in wrong direction.

Bend Direction




FlexiBRITE Side-Bend G2
only bends as shown above.

Also Available



FlexiBRITE Back-Bend G2
only bends as shown above.

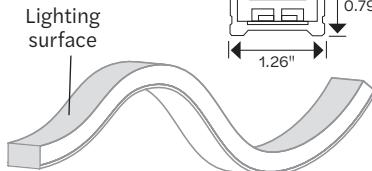


FlexiBRITE Wide G2
only bends as shown above.

FLEXIBRITE SIDE-BEND G2

Flexible LED illumination




Accessories

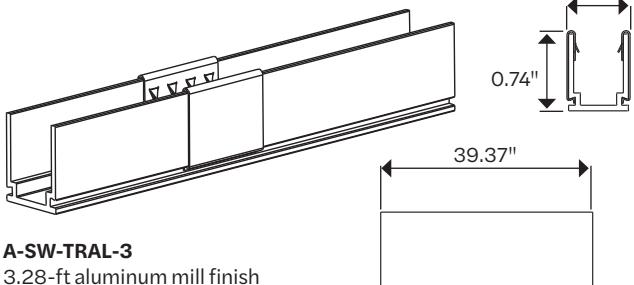


A-SW-TRAL-3

3.28-ft aluminum mill finish extrusion for outdoor applications.

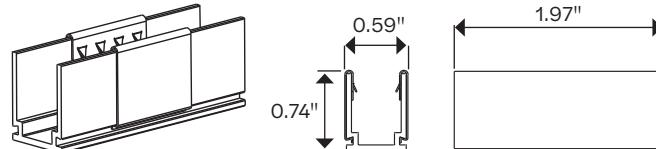


A-SW-CLAL

Aluminum mill finish clips for outdoor applications.

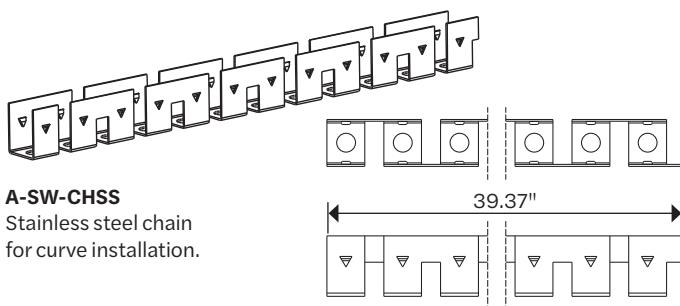

A-SW-CHSS

Stainless steel chain for curve installation.

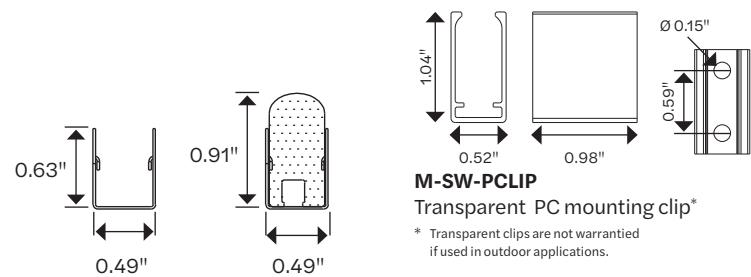


M-SW-PCLIP

Transparent PC mounting clip*

* Transparent clips are not warranted if used in outdoor applications.

End Caps

End cap quantities are available upon request.



A-SW-ECKIT

Silicone end cap kit.



Includes silicone glue, ten (10) end caps and ten (10) inserts.

X-C-SW-S1C


Silicone end cap insert.

Wiring


Single color product.



Dimensions

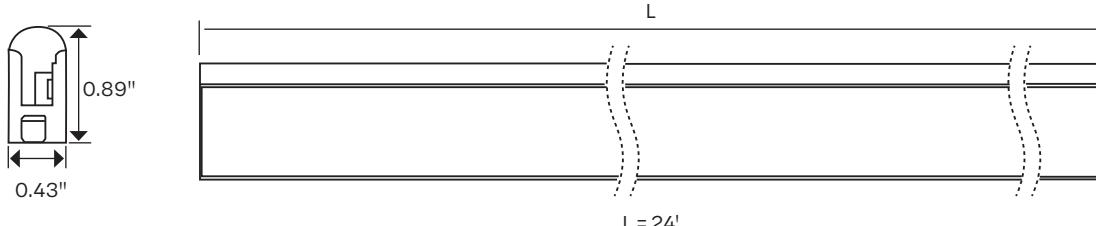

(Distance between connection wires)

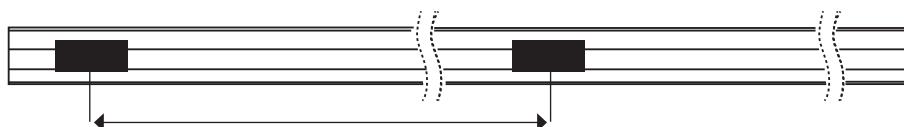

pindustries.com

325.227.4577

3490 Venture Dr., San Angelo, TX 76905

© 2026 Principal Industries Rev C 2026-02-09

