

HE 300 W 24 VDC POWER SUPPLY



Specifications

SKU P-OH300-24-HE
Warranty 10-year product/5-year limited labor

Performance


Input voltage 120~277 VAC
Input current 2.9-1.27 A
Input frequency 50/60 Hz
Power factor 0.9
Output voltage 24 VDC
Output current 0.41-4.1 A (per channel, 3-channel)
Output power 300 W Max.

Safety

Over current protection 110-120%
Short circuit protection Hiccup mode, auto-recover
Other protection Over-voltage
UL UL879 / UL8750
CE-LVD EN61347-1:2008+A1:2011+A2:2013
EN61347-2-13:2014



Dimensions

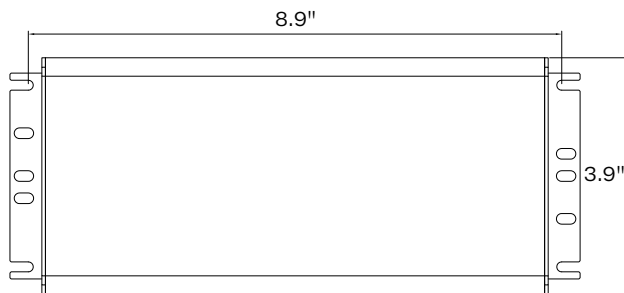

principal Sloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905



Environmental

CE-EMC EN55015, EN61527, EN61000
FCC FCC 47 CFR PART 15, CLASS B
IP rating IP67
UL environmental suitability... Damp and dry
Operating temperature -40°~+90° C
Storage temperature -40°~+85° C
Relative humidity 20~±90% RH, non-cond.

Wiring Diagram

