

HanleyLED

# KESTREL 12V

12V LED channel letter illumination

**12**  
**VDC**



**Kestrel Series**

## Specifications


- SKU ..... 10000 K ..... HLED-KS2100W10K  
7500 K ..... HLED-KS2100W
- Beam angle ..... 180° Kestrel optics
- Ideal depth ..... 2-10"
- Power (W) ..... 1 W/mod (1.5 W/ft)
- Color temperatures ..... 10000 K, 7500 K
- Efficacy ..... 165 lm/W
- Lumens ..... 165 lm/mod (247 lm/ft)
- Modules/ft ..... 1.5/ft (fully-stretched)
- Environment ..... IP65 waterproof\*
- Operating temp. .... -40° C to +60° C
- Storage temp. .... -40° C to +70° C
- Cascade ..... 20 mods single-ended power feed  
40 mods double-ended power feed
- Packaging ..... Anti-static bag, 80 modules (53 ft)/bag,  
10 bags/box
- Warranty ..... 10-Year Product/5-Year Limited Labor



## Power Supply Options

Product	35 W, 12V	60 W, 12V	100 W, 12V	120 W, 12V	150 W, 12V	180 W, 12V	240 W, 12V
Kestrel 12V	35 mods	60 mods	100 mods	120 mods	150 mods	180 mods	240 mods

## Dimensions

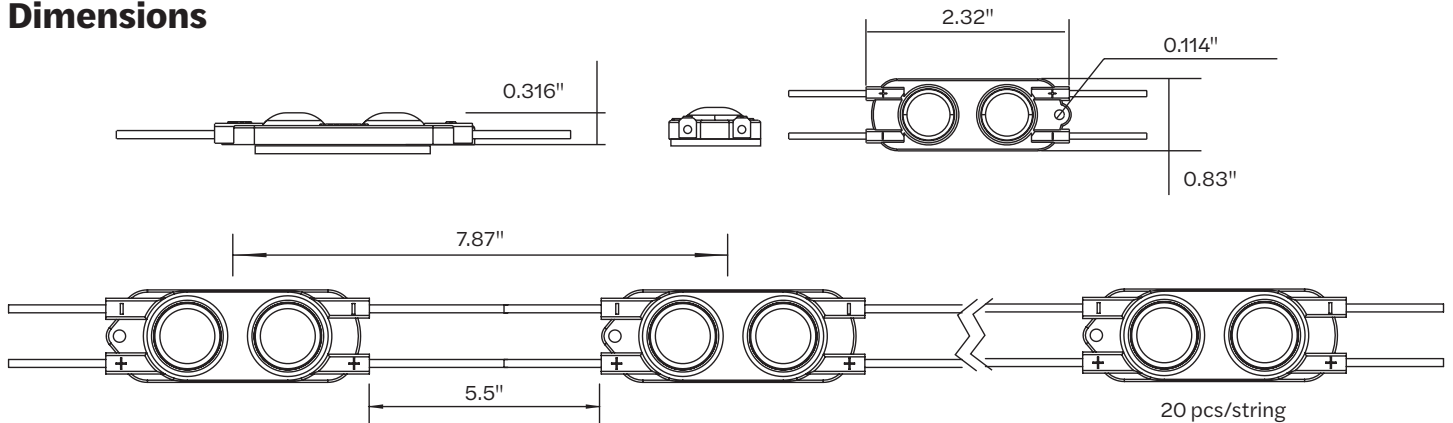

principal Sloan.com  
 325.227.4577  
 3490 Venture Dr., San Angelo, TX 76905

