

HanleyLED

KESTREL 24V

24V LED channel letter illumination

24
VDC



Kestrel Series

Specifications


- SKU HLED-KS2100W24V
- Beam angle 180° Kestrel optics
- Power (W) 1 W/mod (1.5 W/ft)
- Color temperature 7500 K
- Efficacy 165 lm/W
- Lumens 165 lm/mod (247 lm/ft)
- Modules/ft 1.5/ft (fully-stretched)
- Environment IP65 waterproof*
- Operating temp. -40° C to +60° C
- Storage temp. -40° C to +70° C
- Cascade 30 mods single-ended power feed
60 mods double-ended power feed
- Packaging Anti-static bag, 60 modules (40 ft)/bag,
10 bags/box
- Warranty 10-Year Product/5-Year Limited Labor



Power Supply Options

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	192 W, 24V	240 W, 24V	288 W, 24V
Kestrel 24V	35 mods	60 mods	96 mods	100 mods	192 mods	240 mods	288 mods

Dimensions

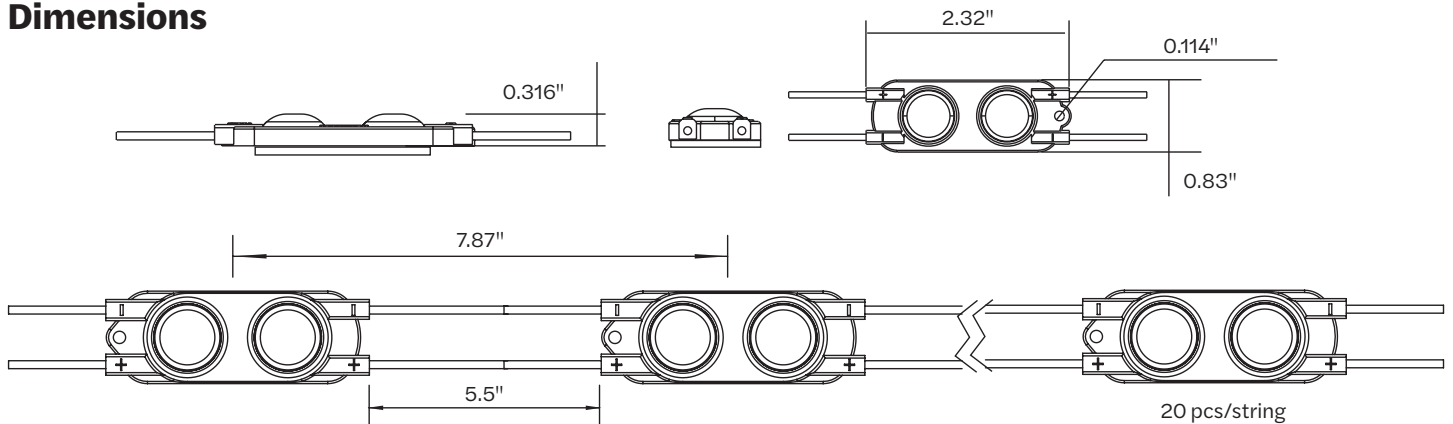

principalsloan.com
 325.227.4577
 3490 Venture Dr., San Angelo, TX 76905

