

LEDBLADE

LED canopy fascia and wall wash fixture

24
VDC

LED Blade

Specifications

Part number 701994-6WA5X1
 Dimensions L x W x H 58.6" x 1.0" x 1.0"
 LEDs per assembly 72
 Cut increments 3.2"^{*}
 Operating temp. -40° C to +70° C
 Life rating L₇₀ @ >60,000 hours
 Power per assembly 30 W
 Optional dimming PWM
 Efficacy 120 lm/W
 Ingress protection IP66
 UL location rating Dry, damp, and wet
 Fastening Mounting clips
 Packaging Twelve (12) assemblies per box
 Color temperature 6500 K
 Lumens per assembly 3,118



* Refer to LEDBlade Install Guide for more information.

Power Supply Capacity


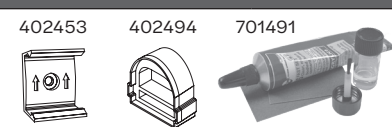
| 24 VDC power supply | Loading |
|------------------------------|---------------------------------------|
| 60 W Power Supply | One (1), 5-ft LEDBlade section |
| 100 W Power Supply | Three (3), 5-ft LEDBlade sections |
| 300 W Power Supply | 3 x three (3), 5-ft LEDBlade sections |
| Power used per foot in Watts | 5.31 W |



principalsloan.com
 325.227.4577
 3490 Venture Dr., San Angelo, TX 76905

© 2026 Principal Industries Rev D 2026-01-20

Accessories

| Accessory | Part number | Description |
|--|---------------|---|
| Cables and connectors | | |
| 701158-120-DC & 701158-180 | 701187-DC | 701188-DC |
|  | | |
| Hook-up cable, 10-ft | 701158-120-DC | Connects LEDBlade to power supply |
| Hook-up cable, 15-ft | 701158-180 | |
| Wiring pigtail, large connector | 701187-DC | Male, outdoor-rated connector |
| Wiring pigtail, small connector | 701188-DC | Female, outdoor-rated connector |
| Mounting | | |
|  | | |
| Mounting clip | 402453 | For mounting product to surfaces |
| Field end cap | 402494 | For adjusting product length |
| Field end cap installation kit | 701491 | Glue, PCB sealer, de-burr sandpaper, instructions |

Specifications subject to change without notice.

