

HanleyLED NRG 2

12 & 24 V LED illumination for small channel letters



Specifications

Beam angle 170° High efficiency optics

Power (W) 0.62 W/mod (1.09 W/ft)

Efficacy 170 lm/W

Modules/ft 1.77/ft (fully-stretched)

Environment IP65 waterproof

Operating temp. -40° C to +60° C


Storage temp. -40° C to +70° C

PE-2 Cascade 40 mods single-ended power feed
80 mods double-ended power feed

PN2-24 Cascade 80 mods single-ended power feed
160 mods double-ended power feed

Packaging Anti-static bag, 80 modules (45 ft)/bag,
7 bags/inner carton, 14 bags/outer carton

Warranty 10-Year Product/5-Year Limited Labor

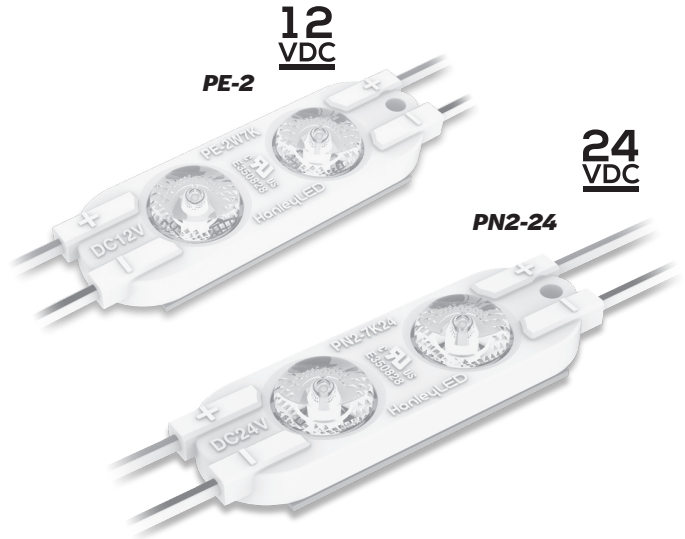


Product Options

SKU	CCT/Color	Lumens
12V	HLED-PE2W7K	7000 K
	HLED-PE2W65K	6500 K
	HLED-PE2W5K	5000 K
	HLED-PE2W4K	4000 K
	HLED-PE2W32K	3200 K
	HLED-PE2W27K	2700 K
24V	HLED-PN2-7K24	7000 K

105 lm/mod
(185 lm/ft)

Light Distribution

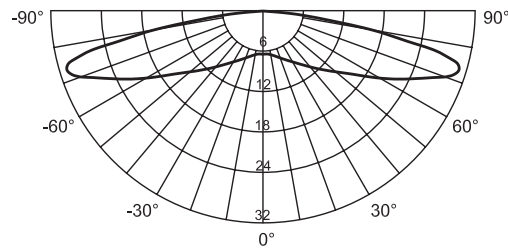


Power Supply Options

Product	35 W, 12V	60 W, 12V	100 W, 12V	120 W, 12V	150 W, 12V	180 W, 12V	240 W, 12V
PE-2, 12V	56 mods	96 mods	160 mods	192 mods	240 mods	288 mods	384 mods

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	150 W, 24V	240 W, 24V	288 W, 24V
PN2-24, 24V	56 mods	96 mods	154 mods	161 mods	240 mods	384 mods	462 mods

Dimensions

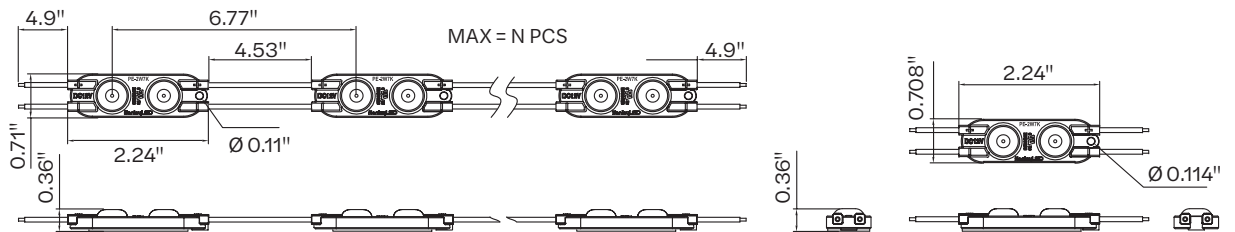

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

