


HanleyLED NRG 4

12 & 24V LED illumination for small channel letters




Specifications

SKU	12V	HLED-PE4W7K
	24V	HLED-PN4-7K24
Beam angle	170° High efficiency optics	
Power (W)	1.44 W/mod (1.83 W/ft)	
Color temperature	7000 K	
Efficacy	170 lm/W	
Lumens	244 lm/mod (309 lm/ft)	
Modules/ft	1.27/ft (fully-stretched)	
Environment	IP65 waterproof	
Operating temp.	-40° C to +60° C	
Storage temp.	-40° C to +70° C	
PE-4 Cascade	20 mods single-ended power feed 40 mods double-ended power feed	
PN4-24 Cascade	40 mods single-ended power feed 80 mods double-ended power feed	
Packaging	Anti-static bag, 40 modules (31 ft)/bag, 9 bags/inner carton, 18 bags/outer carton	
Warranty	10-Year Product/5-Year Limited Labor	

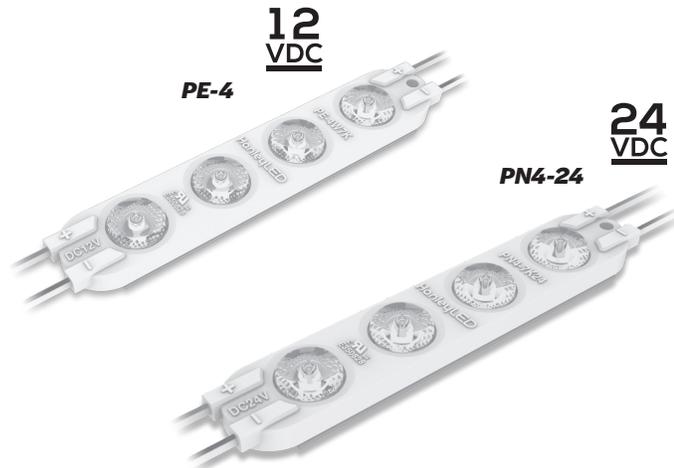

Light Distribution

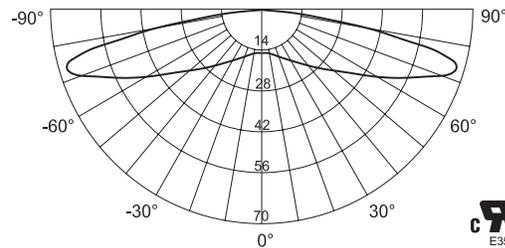


Power Supply Options

Product	35 W, 12V	60 W, 12V	100 W, 12V	120 W, 12V	150 W, 12V	180 W, 12V	240 W, 12V
PE-4	24 mods	41 mods	68 mods	82 mods	102 mods	123 mods	164 mods

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	150 W, 24V	240 W, 24V	288 W, 24V
PN4-24	24 mods	41 mods	66 mods	69 mods	104 mods	164 mods	128 mods

Dimensions

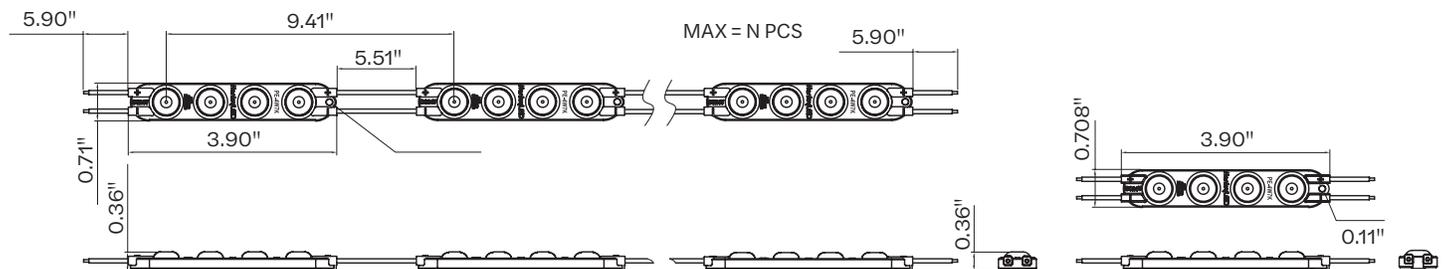

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

