

HanleyLED

NRG MINI 1

12V LED illumination for small channel letters

12
VDC



**Ideal for small channel letters,
routed acrylic in-lay letters
and tiny serifs**


Specifications

- SKU White 7000 KHLED-PEMINIW7K
Red (620-625 nm) ...HLED-PEMINIRED
- Beam angle170° x 140° Phoenix wing optics
- Power (W).....0.36 W/mod (1.58 W/ft)
- Efficacy165 lm/W
- Lumens White 7000 K76 lm/mod (174 lm/ft)
Red15 lm/mod (66 lm/ft)
- Modules/ft4.4/ft (fully-stretched)
- EnvironmentIP67 waterproof
- Operating temp.-40° C to +60° C
- Storage temp.-40° C to +70° C
- Cascade50 mods single-ended power feed
100 mods double-ended power feed
- PackagingAnti-static bag, 150 modules (34 ft)/bag
- Warranty10-Year Product/5-Year Limited Labor



**Constant
Current**


Light Distribution

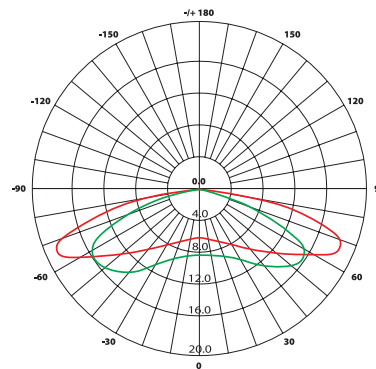

Power Supply Options

Product	35 W	60 W	100 W	120 W	150 W	180 W	240 W
NRG Mini 1	97 mods	166 mods	276 mods	332 mods	414 mods	498 mods	664 mods

Dimensions

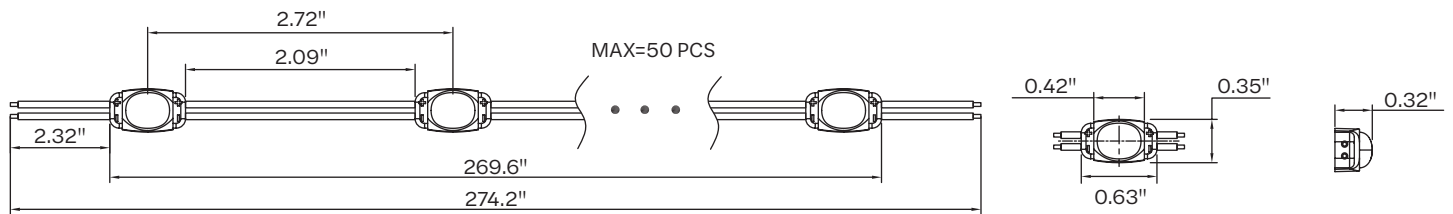

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

