

HanleyLED

NRG MINI 1 PRO

24
VDC

24V LED illumination for small channel letters



Specifications


- SKU HLED-PNMINIW7K
- Beam angle 170° x 140° Phoenix wing optics
- Power (W) 0.36 W/mod (1.58 W/ft)
- Color temperature 7000 K
- Efficacy 165 lm/W
- Lumens 59 lm/mod (261 lm/ft)
- Modules/ft 4.4/ft (fully-stretched)
- Environment IP67 waterproof
- Operating temp. -40° C to +60° C
- Storage temp. -40° C to +70° C
- Cascade 75 mods single-ended power feed
150 mods double-ended power feed
- Packaging Anti-static bag, 150 modules (34 ft)/bag
- Warranty 10-Year Product/5-Year Limited Labor

*Ideal for small channel letters,
routed acrylic in-lay letters
and tiny serifs*



**Constant
Current**


Light Distribution

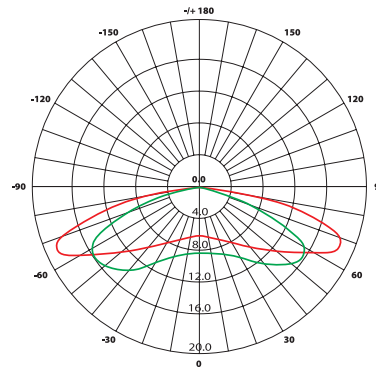

Power Supply Options

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	150 W, 24V	240 W, 24V	288 W, 24V
NRG Mini 1 Pro	97 mods	166 mods	266 mods	276 mods	414 mods	664 mods	798 mods

Dimensions

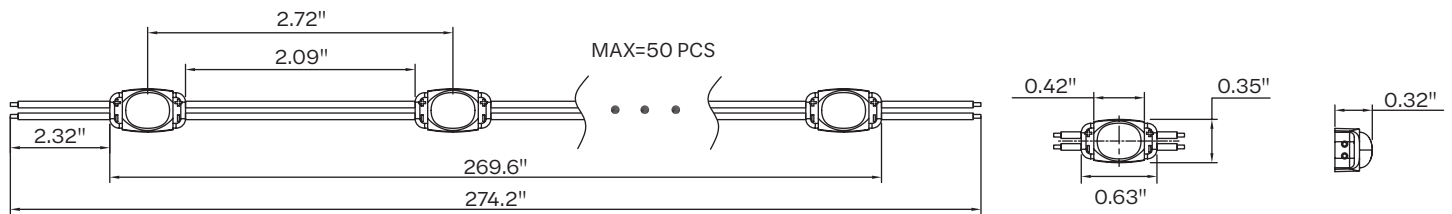

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

