

HanleyLED

PHOENIX 3

12
VDC


12V LED channel letter and sign cabinet illumination



Specifications

- Beam angle 170° Phoenix wing optics
- Power (W)..... 1.2 W/mod (1.77 W/ft)
- Efficacy 114 lm/W
- Modules/ft 1.48/ft (fully-stretched)
- Environment IP68
- Operating temp. -40° C to +60° C
- Storage temp. -40° C to +70° C
- Cascade 40 mods single-ended power feed
80 mods double-ended power feed
- Packaging Anti-static bag, 80 modules (54 ft)/bag
- Warranty 10-Year Product/5-Year Limited Labor

Slim module design

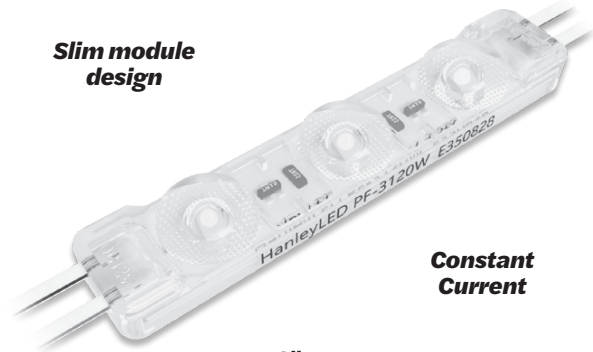


Constant Current

16" max stroke

Product Options

SKU	CCT/Color	Lumens
HLED-PF3120WCO	9000 K	132 lm/mod (195 lm/ft)
HLED-PF3120W	7000 K	137 lm/mod (202.76 lm/ft)
HLED-PF3120R	Red (620-625 nm)	41 lm/mod (60 lm/ft)


Light Distribution

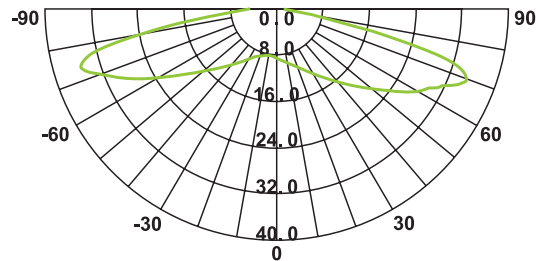

Power Supply Options

Product	35 W	60 W	100 W	120 W	150 W	180 W	240 W
Phoenix 3	29 mods	50 mods	82 mods	100 mods	123 mods	150 mods	200 mods

Dimensions

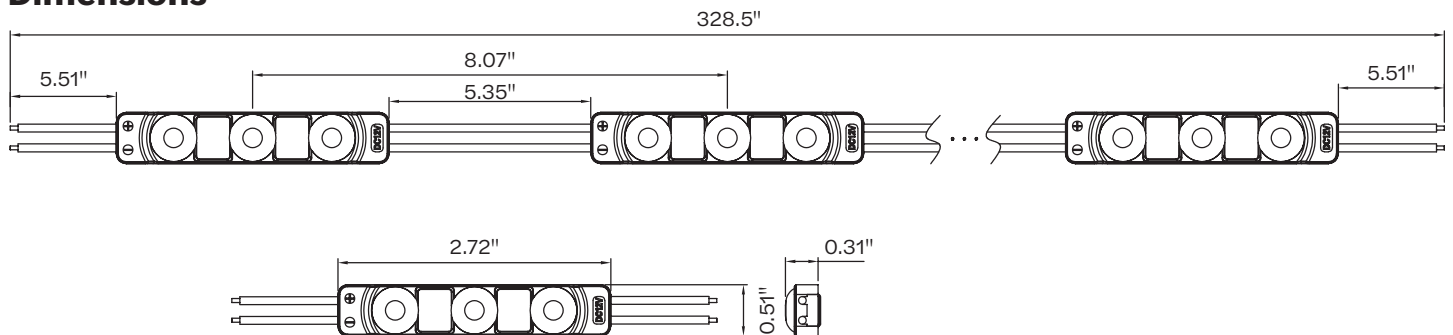

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

