

POSTERBOX SLIM 2

Side illumination for shallow light boxes

12
VDC



Specifications

SKU 6500 K 701946-6WXL3
 5000 K 701946-5WXL3

Dimensions L x W x H 5.00" x 1.00" x 0.67"

Viewing angle 15° x 43°

Light coverage* 2 ft

LEDs per module 3

Modules per ft 1.4†

Color temperatures 6500 K, 5000 K

Min. cabinet depth 2", single or double-sided

Operating temperature -40° C to +70° C

Protection class IP66


Power per module 1.68 W

Efficacy 110 lm/W

Fastening Peel-n-stick and mechanical

Packaging 32 daisy-chained modules per bag,
 4 bags per carton

Lumens per module 185

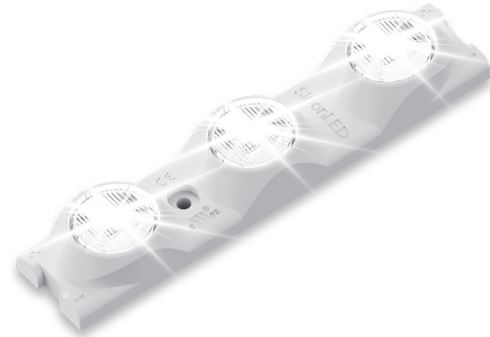

* Testing highly recommended as all substrates and graphics vary.
 † For best performance, 2 mods/ft spacing is recommended.

Power Supply Capacity

12 VDC power supply	PosterBOX Slim 2
20 W Power Supply	7.1 ft / 10 mods
60 W Power Supply	22.7 ft / 32 mods
2 x 60 W Power Supply	2 x 22.7 ft / 32 mods
Watts per module	1.68

The PosterBOX™ product family is licensed by Signify (formerly Philips Lighting) in relation to the following patents:
 North America: US7841733. Europe: EP1938298, NL1030161, NL2000273, DE202006020673.6. Asia: CN101300616.
 PosterBOX products are licensed under Signify's EnabLED program when bought as a PosterBOX lighting kit solution
 including a SloanLED power supply. Final application in which PosterBOX lighting kit solution is installed is covered by
 SloanLED's licensing agreement with Signify and free from any further royalties relating to the patents listed above.



principalsloan.com
 325.227.4577
 3490 Venture Dr., San Angelo, TX 76905

