

STREAMLINER ^{G2}


LED lighting solution for retrofit light box applications



Specifications

Dimensions L x W x H See table x 0.73" x 1.01"
 Beam angle 170°
 Color temperature 7000 K
 Efficacy 130 lm/W
 Socket type R17d
 Max. current loading 5 A
 for 18 AWG cable
 Mounting options Socket (retro)
 IP rating IP65
 Input voltage 100~277 VAC
 Packaging 6 tubes per case
 Warranty 7-Year Product /
 5-Year Limited Labor*

**No power supply needed.
 Built-in driver direct-wired to
 Swift Connect® system for
 faster installation!**

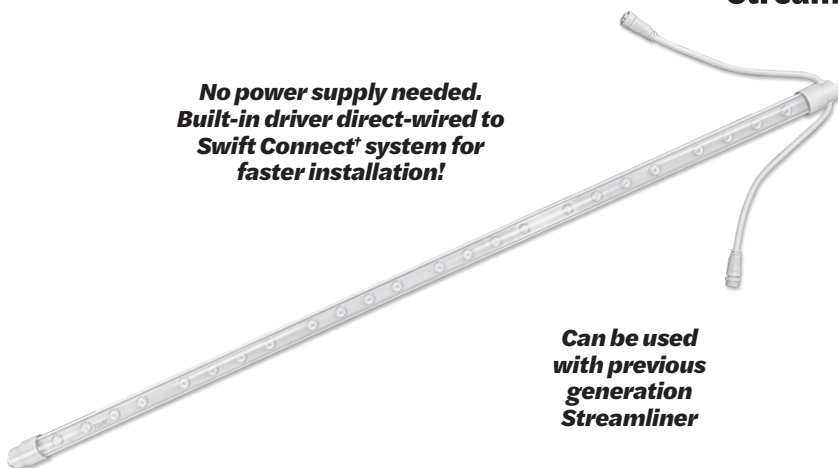

**Can be used
 with previous
 generation
 Streamliner**

Product Options

Nominal length	True length	SKU	Lumens per Stik	LED lamp cross reference	Power	Max input (Amps)	Max. cascade (pcs)
24"	21.81"	M-SLE024-AC-70	1300	F24HO	10	0.10	55
30"	27.81"	M-SLE030-AC-70	1950	F30HO	13	0.12	46
36"	33.81"	M-SLE036-AC-70	2100	F36HO	16	0.14	37
42"	39.81"	M-SLE042-AC-70	2375	F42HO	18	0.16	33
48"	45.81"	M-SLE048-AC-70	2750	F48HO	21	0.18	28
60"	57.81"	M-SLE060-AC-70	3400	F60HO	26	0.22	23
64"	61.81"	M-SLE064-AC-70	3700	F64HO	28	0.24	21
72"	69.81"	M-SLE072-AC-70	4080	F72HO	31	0.26	19
84"	81.81"	M-SLE084-AC-70	4800	F84HO	37	0.32	16
96"	93.81"	M-SLE096-AC-70	5500	F96HO	42	0.36	14
108"	105.81"	M-SLE108-AC-70	6150	F108HO	47	0.40	12
117"	114.81"	M-SLE117-AC-70	6500	F117HO	50	0.42	12
120"	117.81"	M-SLE120-AC-70	6800	F120HO	52	.44	11

Layout Guidelines


Double-sided light box depth	Max. space between tubes
6"	6"
8"	12"
12"	12"
16"	16"

Notes: Light box size: 79" x 59".
 Tested with 3/16" 7328 white acrylic.

* Warranty period is only for products which are used inside of waterproof light box and valid only when used as a system with surge protectors.



Dimensions

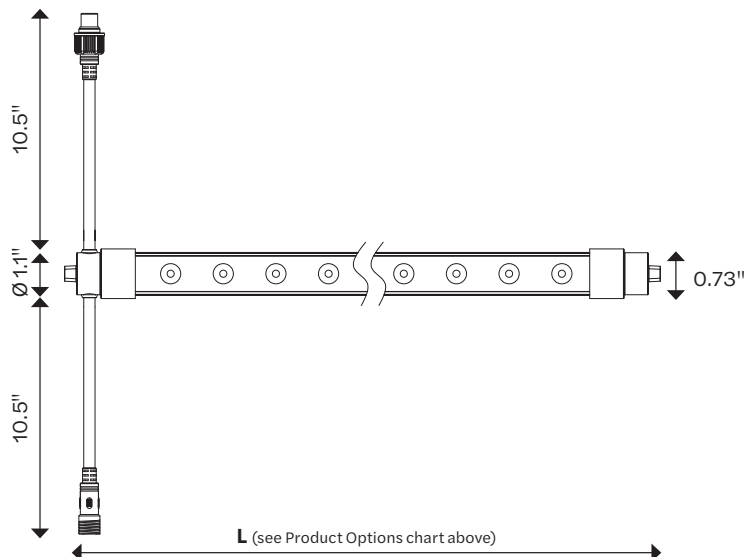

Specifications subject to change without notice.



STREAMLINER

G2


LED lighting solution for retrofit light box applications




Accessories




HPEB-SL-CABLE†
Connector cable

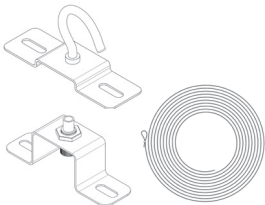

A-SLE-MS-WIRE
Cable mounts and cable




A-SLE-MS-CLIP
Mounting clip



HPEB-SP10KV
Surge protector

Maximum number of sticks on a surge protector is equal to the maximum number of sticks in series.

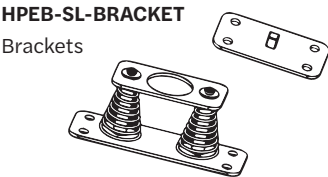

HPEB-SL-BRACKET
Brackets

† All Stiks with SwiftConnect must use NRG Streamliner Connector Cable to make AC connections (sold separately).

Discontinued Part Numbers

Nominal length	SKU
30"	HPEB-SL2S30
36"	HPEB-SL2S36
42"	HPEB-SL2S42
48"	HPEB-SL2S48
60"	HPEB-SL2S60
64"	HPEB-SL2S64
72"	HPEB-SL2S72
84"	HPEB-SL2S84
96"	HPEB-SL2S96
108"	HPEB-SL2S108
117"	HPEB-SL2S117
120"	HPEB-SL2S120

NOTE: Discontinued versions of Streamliner listed here are presented for reference only and are no longer available for order.

