


## Specifications

- Dimensions L x W x H ..... 3.05" x 0.70" x 0.37"
- LEDs per module ..... 3
- Mounting options ..... Peel-N-Stick and mechanical
- Optional dimming ..... PWM (Pulse width modulation, SloanLED Universal LED Wireless Dimmer 601115)
- Operating temp. .... -40° C to +60° C
- Binning ..... MacAdam Ellipse 3-Step (whites)
- Environment ..... IP66 & IP68\*
- Life rating ..... >60,000 hours†
- Warranty ..... 10-Year Product / Labor



## Luminous Intensity Distribution

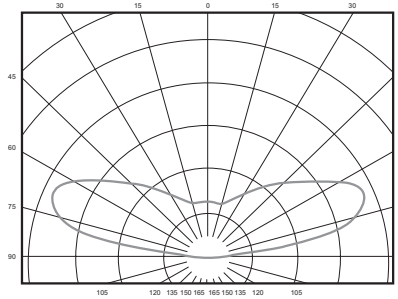

\* Prism<sup>12</sup> IP68 test parameters are 1.3 m submersion for 30 minutes. Do not mount in submerged application or where module will be directly exposed to prolonged flowing or dripping water.  
 † Configured for Class 2 Output.  
 ‡ Based on LM-80 data for white LEDs.



## Whites

Modules per ft	Color temperature	SKU	Optimal can depth	Power per module	Lumens per module (nominal)	Efficacy	Packaging
1.5	7100 K <sup>§</sup>	701269-7W12SJ1-MB	3-8"	0.92 W	124	135 lm/W	38.7 ft (58 modules) per bag, 5 bags per carton
	6500 K	701269-6W12SJ1-MB					
	5000 K <sup>§</sup>	701269-5W12SJ1-MB					
	4000 K <sup>§</sup>	701269-4W12SJ1-MB					
	3000 K	701269-3W12SJ1-MB					

§ Availability limited: Call to confirm.

## Colors

Modules per ft	Color	Nominal wavelength	SKU	Optimal can depth	Power per module	Lumens per module (nominal)	Efficacy	Packaging	
1.5	Red	628 nm	701269-RD12SJ1-MB	3-8"	0.72 W	24	33 lm/W	50.0 ft (75 modules) per bag, 4 bags per carton	
	Orange	606 nm	701269-OR12SJ1-MB		0.52 W		46 lm/W	69.3 ft (104 modules) per bag, 3 bags per carton	
	Green <sup>§</sup>	527 nm	701269-GR12SJ1-MB		0.72 W		59	82 lm/W	50.0 ft (75 modules) per bag, 4 bags per carton
	Blue	471 nm	701269-BL12SJ1-MB				18	25 lm/W	

§ Availability limited: Call to confirm.

## Power Supply Options

12 VDC Power Supply†	White (7100 K, 6500 K, 5000 K, 4000 K, 3000 K)	Red, Green, Blue	Orange
20 W	12.7 ft / 19 mods	16.7 ft / 25 mods	22.7 ft / 34 mods
60 W	38.7 ft / 58 mods	50.0 ft / 75 mods	69.3 ft / 104 mods
2 x 60 W	2 x 38.7 ft / 58 mods	2 x 50.0 ft / 75 mods	2 x 69.3 ft / 104 mods

## Density Guidelines

Model	Module color	Can Depth	Modules per foot	Max. stroke coverage per row		Inches on center dark vinyl*	Inches on center perforated vinyl*
				Single row	Multiple rows		
Standard	White (7100 K, 6500 K, 5000 K, 4000 K, 3000 K)	3"	1.5	12.5"	9.5" on center	8.5	7.5
		4"		16"	12" on center	11	10
		5-8"		18"	17" on center	16	15
	Red	2"	3	4"	5" on center	4	3
		3"	1.5	12"	9" on center	8	7
		4"		14"	13" on center	12	11
	5-8"	17"		15" on center	14	13	
	Orange	3"	1.5	11"	7" on center	6	5
		4"		14"	11" on center	10	9
		5-8"		16"	13" on center	12	11
	Green	3"	2	9.5"	11" on center	10	9
		4"	1.5	14"	13" on center	12	11
		5-8"		16"	14" on center	13	12
	Blue	3"		1.5	10"	9.5" on center	8
		4"	13"		10.5" on center	9	8
		5-8"	17"		15" on center	14	13

These guidelines are intended to provide only an approximation of product required for your sign, assuming an optimal balance of performance and cost. Principal Sloan is not responsible for the actual results based on the use of these guidelines.

All spacing guidelines in this chart were done using 7328 White Acrylic faces. Other materials, thicknesses, and color can affect these guidelines in your sign. To ensure accuracy, it is recommended that you test the product in your specific application in a dark setting prior to installation. If you have concerns or questions about the materials you are using for your application please contact us for assistance.

**Notes:**

- It is recommended that you first test LED density in sample letter/cabinet to evaluate brightness, uniformity and color
- Should you have questions or require assistance in testing, please contact your SloanLED customer service representative
- For multiple rows, start 3" from return
- Products can be used in can depths deeper or shallower than listed above, but testing is recommended



principalsloan.com

325.227.4577

3490 Venture Dr., San Angelo, TX 76905