

# QWIK MOD™ 24V **G2** **24** VDC

24V LED channel letter illumination



## Specifications

**Dimensions L x W x H** ..... Qwik Mod 1 ..... 1.26" x 0.67" x 0.47"  
 Qwik Mod 2 ..... 2.20" x 0.67" x 0.43"  
 Qwik Mod 3 ..... 3.15" x 0.67" x 0.43"

**Beam angle** ..... 170°


**Mounting options** ..... Peel & Stick and mechanical screw hole

**Operating temp** ..... -30° C to +60° C

**Environment** ..... IP67

**Wire color** ..... Whites ..... White solid (+) / Gray (-)  
 Colors ..... Red, Green, or Blue solid (+)  
 / Gray (-)

**Warranty** ..... 10-Year Product / 5-year Limited Labor

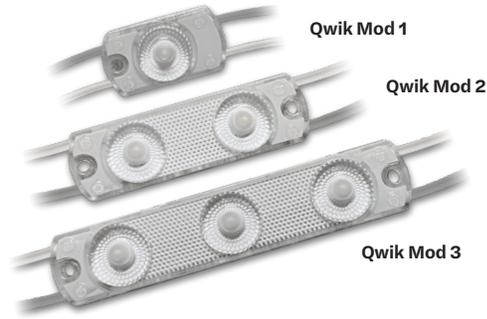

**Qwik Release Tab reduces labor time**



Product	Mods/ft	Max. mods (series) <sup>§</sup>	CCT/Wavelength	SKU	Power/mod	Intensity	Efficacy	Packaging	Max. mods/96W power supply
Qwik Mod 1	2.25	90 mods (40 ft)	7100 K	M-QMG21-24-71	0.35 W	56 lm/mod (126 lm/ft)	160 lm/W	Mods per bag: 270 (120 ft) Bags per case: 6 Mods per case: 1620 (720 ft)	270
			6500 K	M-QMG21-24-65					
			5000 K	M-QMG21-24-50					
			4000 K	M-QMG21-24-40					
			3000 K	M-QMG21-24-30					
Qwik Mod 2	1.45	65 mods (44.83 ft)	7100 K	M-QMG22-24-71	0.68 W	112 lm/mod (162 lm/ft)	165 lm/W	Mods per bag: 130 (89.66 ft) Bags per case: 10 Mods per case: 1300 (896.55 ft)	130
			6500 K	M-QMG22-24-65					
			5000 K	M-QMG22-24-50					
			4000 K	M-QMG22-24-40	0.71 W	31 lm/mod (45 lm/ft)	43 lm/W		
			3000 K	M-QMG22-24-30					
			Red (625 nm)	M-QMG22-24-RD					
			Green (525 nm)	M-QMG22-24-GR					
Blue (460 nm)	M-QMG22-24-BL	12 lm/mod (18 lm/ft)	17 lm/W						
Qwik Mod 3	1.35	45 mods (33.33 ft)	7100 K	M-QMG23-24-71	1.0 W	160 lm/mod (216 lm/ft)	160 lm/W	Mods per bag: 90 (66.7 ft) Bags per case: 10 Mods per case: 900 (666.67 ft)	90
			6500 K	M-QMG23-24-65					
			5000 K	M-QMG23-24-50					
			4000 K	M-QMG23-24-40					
			3000 K	M-QMG23-24-30	43.75 lm/mod (59 lm/ft)	43 lm/W			
			Red (625 nm)	M-QMG23-24-RD					
			Green (525 nm)	M-QMG23-24-GR					
			Blue (460 nm)	M-QMG23-24-BL					
					97.95 lm/mod (132 lm/ft)	96 lm/W			
					16.57 lm/mod (22 lm/ft)	16 lm/W			

## Recommended Coverage Charts



Model	Depth	Mod /ft	Single stroke max. width	Multi-row on-center spacing
Qwik Mod 1 (all CCTs)	2"	4	5"	3"
	3"	3	8"	6"
	4"	2.25	12"	10"
	5"		14"	12"
Qwik Mod 2 (all CCTs, Red, Green, Blue)	4"	1.45	12"	10"
	5"		16"	14"
	6"		18"	15"

Model	Depth	Mods /ft	Single stroke max. width	Multi-row on-center spacing
Qwik Mod 3 (all CCTs, Red, Green, Blue)	4"	1.35	10"	8"
	5"		14"	13"
	6"		18"	14"
	7"		22"	16"
	8"		24"	18"

\* For maximum brightness, adjust to 12" spacing.

principalsloan.com  
 325.227.4577  
 3490 Venture Dr., San Angelo, TX 76905

