

RGB CABLE

22 AWG, 4-conductor bonded ribbon cable

Specifications

SKUX-C-W4C22RGB

Conductor

#22, 7/30 tinned copper 0.75" concentric lay
Nominal O.D.: 0.030"
Approximate circular mill area: 700
Weight per thousand feet: 2.20 lbs.
Basic specification: ASTM B B, ASTM B 286

Insulated Singles

AWM style 1569, 105° C-300v; or AWM style 1007 80° C-300v;
or CSA TR64 90° C FT1 or CSA AWM 1 A/B 105° C-600v FT1


PVC

Temperature rating: 105° C
Voltage rating: 300 volts
Elongation: 330% average
Tensile strength: 2450 psi average
Specific gravity: 1.32
Durometer (shore): 91 (A)
Oxygen index: 28
Brittle point: -24° C
Spark tested: 7,100 volts
Finished O.D.: 0.062"
Weight per thousand feet: 3.60 lbs.

Bonded Cable

Spark tested: 7,100 volts
Height: 0.062"
Width: 0.248"
Weight per thousand feet: 14.40 lbs.

Regulatory compliances REACH, RoHS, UL, CSA

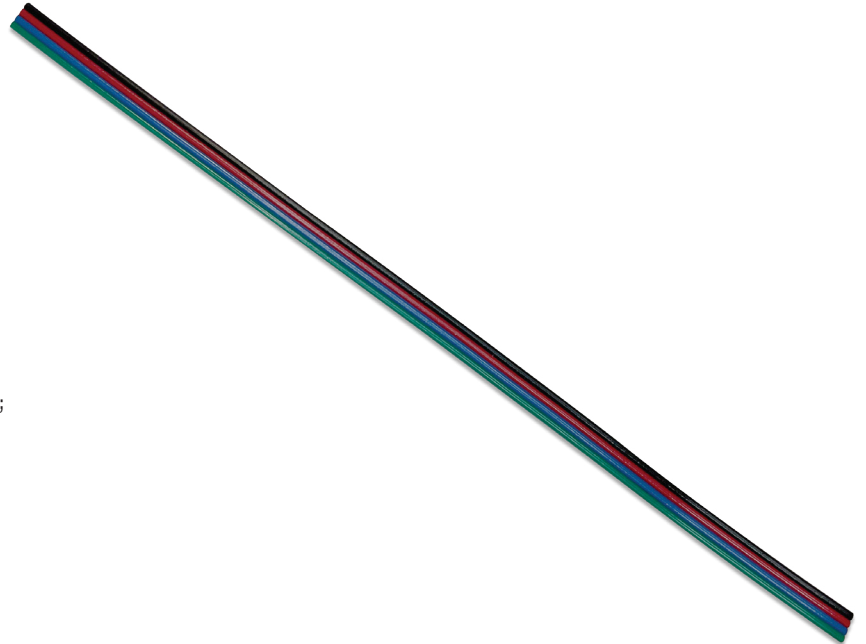

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905