

# RGBW CABLE

18 AWG, 5-conductor bonded ribbon cable

## Specifications

SKU .....X-C-W4C18RGBW

### Conductor

#18, 16/30 tinned stranded copper  
Nominal O.D.: 0.048"  
Approximate circular mill area: 700  
Basic specification: ASTM B 174 B3


### Insulated Singles

AWM style 1569, 105° C-300v; or AWM style 1007, 80° C-300v, VW-1 CSA  
150272 TR-64 90C FT1; or AWM I-A/B 105° C-300v FT1

### PVC

Temperature rating: 105° C  
Voltage rating: 300 volts  
Elongation: 330% average  
Tensile strength: 2450 psi average  
Wall thickness: approx. 0.016"  
Insulated minor O.D.: approx. 0.080"  
Insulated major O.D.: approx. 0.400"  
Weight per thousand feet: approx. 34.67 lbs.

Regulatory compliances ..... REACH, RoHS, UL, CSA

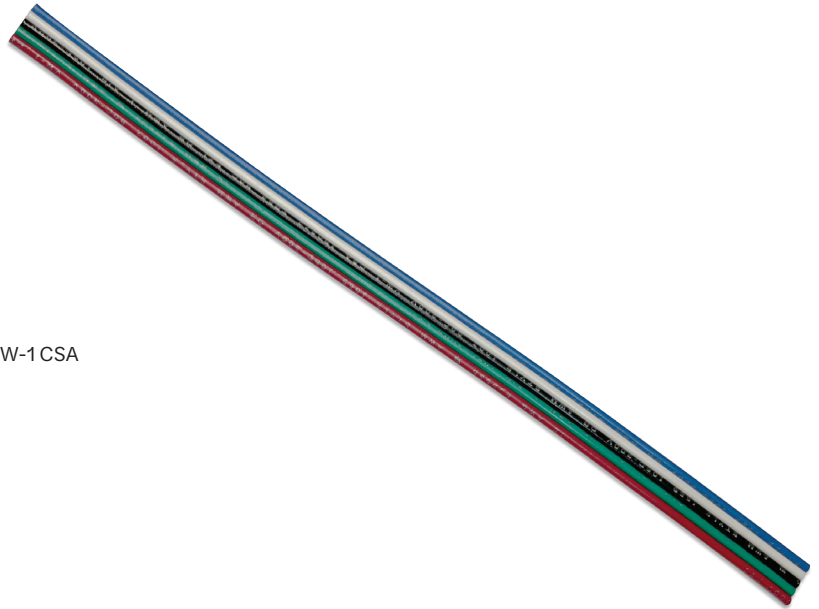

principalsloan.com  
325.227.4577  
3490 Venture Dr., San Angelo, TX 76905