

SHOWCASE SPOT WASHER RGBW

LED flood light for facade illumination

SHOWCASE SERIES

Features

- Superior color mixing – precise optics control, RGBW for fine-tuned color
- DMX Control – dimmable, dynamic lighting control
- Easy installation and maintenance – quick installation and reliable connection by self-locking water-proof connectors



Optical Specifications

- Light source 18 LEDs
- Luminous flux 16200 lm
- Efficacy 35 - 45 lm/W
- CCT RGBW
- CRI 80 (White LED)
- Beam angle 30°, 60°

Electrical/Mechanical Specifications


- Input voltage 24 VDC
- Power consumption 36 W
- Dimensions ($\phi D \times L$) 7.87" x 6.5"
(Excluding mounting bracket)
- Weight 7 lbs.
- Cover lenses Tempered glass cover
- Housing Aluminum

System Specifications

- Control DMX512
- Adjustment options $\pm 90^\circ$ tilt
- Operating temperature $-4^\circ F - 122^\circ F$
- Storage temperature $-40^\circ F - 176^\circ F$
- Environment Outdoor (IP66)
- Lumen maintenance $L_{70} @ 25^\circ C - 50,000$ hours
- Safety approval Electrical Protection Class III, CE, CB, RoHS, UL
- Warranty 3-year parts only



Dimensions

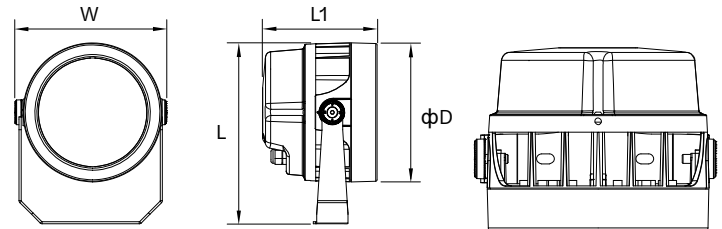

Fixture

- ϕD 7.87"
- W 8.62"
- L 10.31"
- L1 6.5"

Input/Output Cable

24"

Product Options

Showcase Washer RGBW Fixtures	Part number
Showcase Spot RGBW 36 W 30D DMX	P-WS4030D-36W-3C
Showcase Washer RGBW 36 W 60D DMX	P-WS4060D-36W-3C

Showcase Washer RGBW Cables	Part number
Showcase Washer 5-pin Starter Cable 6-ft	P-WS-5PS-2M
Showcase Washer 5-pin Interconnection Cable 3-ft	P-WS-5IC-1M
Showcase Washer 5-pin Interconnection Power Injection Cable	P-WS-5IT-CAB
Showcase Washer 5-pin Connector Socket End Cap	P-WS-5PC-EC

Specifications subject to change without notice.




SHOWCASE SPOT WASHER RGBW


LED flood light for facade illumination

SHOWCASE
SERIES

Showcase Spot Washer System Diagram DC DMX Version

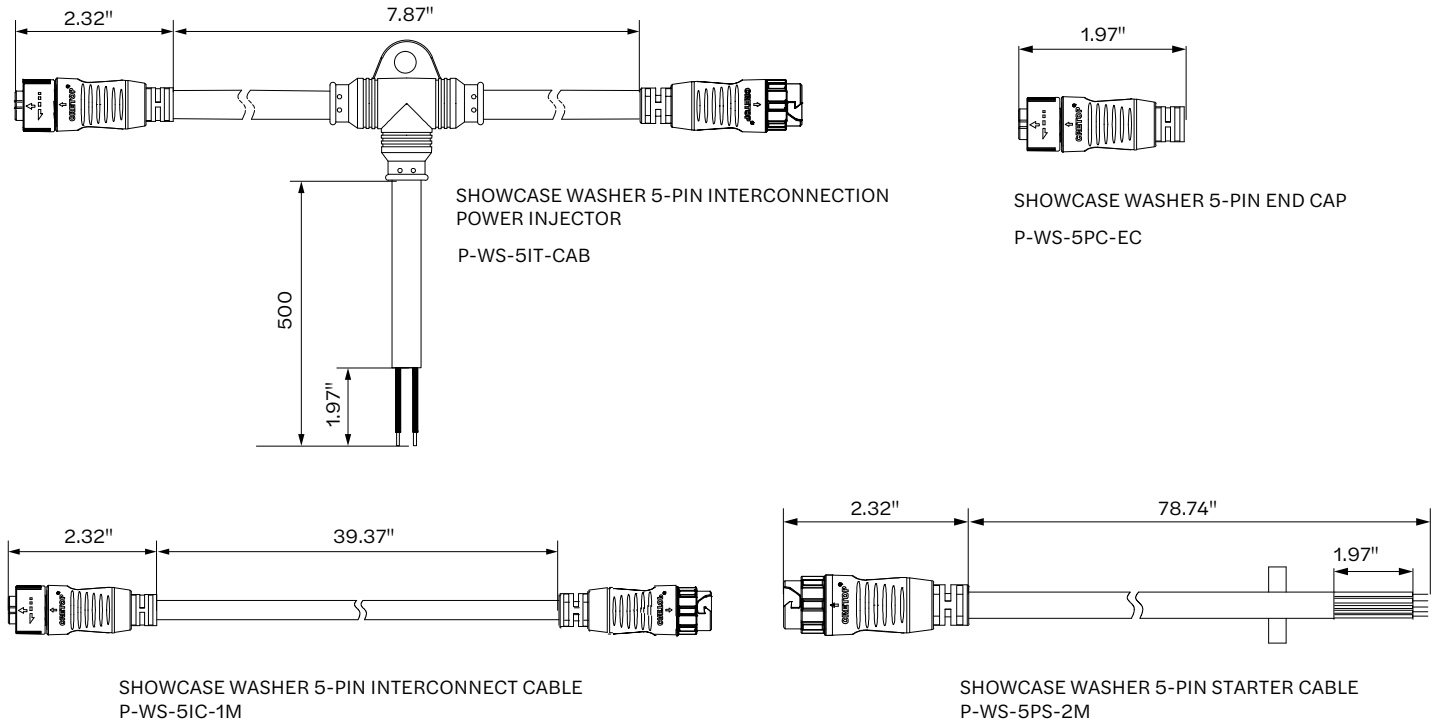

DC DMX Version System Diagram

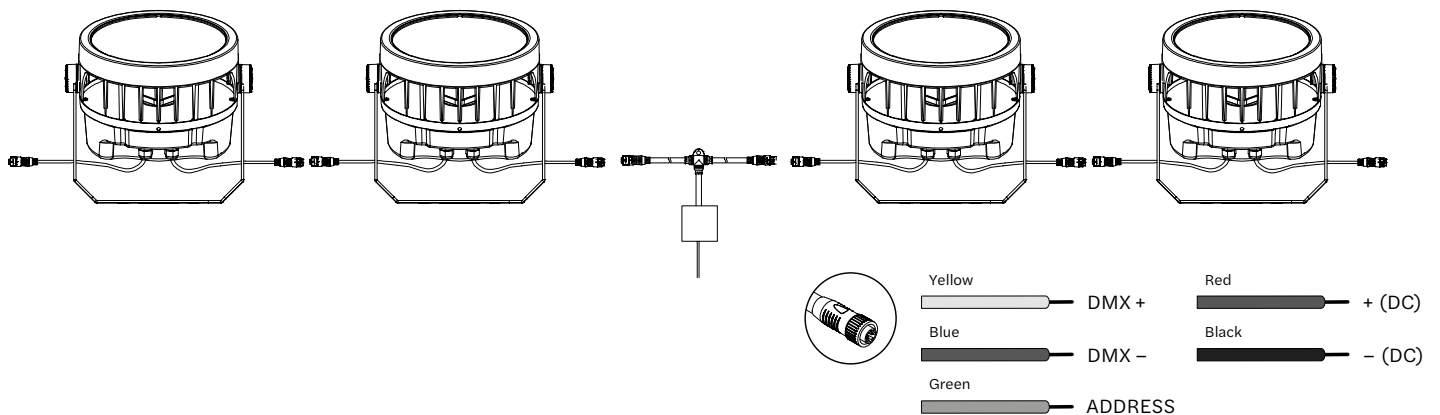

© pindustries.com
 325.227.4577
 3490 Venture Dr., San Angelo, TX 76905

© 2023 Principal Industries Rev A 2023-06-07

