

STREET WRAP™ FLEX POD 24 VDC

Flexible LED illumination



FLEX

Specifications

Dimensions L x W x H L (see table) x 1.06" W x 0.63" H
 Input 24 V
 Min. bend radius 6"
 Power 4.73 W/ft.
 Operating temp. -40° C to +65° C
 Environment IP67
 Power supply Principal Sloan 24V
 Warranty 5-year Product/5-year Labor

Available with multiple feeds: Back, End

Easy installation



Dual extrusion, diffused, UV resistant silicone lens, and thermal conductive base

Product Options



| CCT/color | Jacket color | Lm/ft | Cut section length | Max. length/ 96 W PS | W/max. length | SKU |
|-----------|--------------|-------|--------------------|-------------------------|---------------|-------------|
| 6500 K | White | 368 | 4.9213" | 241.1417" | 95.1 | M-SPX020-65 |
| 5000 K | | | | | | M-SPX020-50 |
| Cyan | | 106 | 9.8425" | 236.2205" | 93.1 | M-SPX019-CN |
| Pink | | 61 | | | | M-SPX019-PK |
| RGB | | N/A | | | | M-SPX019-3C |

IMPORTANT WARRANTY INFO

This warranty is void if any cuts are made in the field.
Any cuts must be made by Principal Sloan to maintain warranty.
NOTE: The LED neon itself and all its components may not be mechanically stressed. Please ensure that the power supply is adequate to operate the total load. Only qualified personnel should be allowed to perform installations. The design of the housing should be according to the IP standards in the application. If surge protection structure not within power supplier, a lightning protector should be needed additionally. Before cutting and sealing, please read the user manual, and please ensure you have read and fully understand it. Please do not twist the product and do not bend it in wrong direction, see Figure 1 for a correct demonstration.

Specifications subject to change without notice.




STREET WRAP™ FLEX POD 24 VDC

Flexible LED illumination



FLEX


Accessories



3.28-ft Aluminum Mill Finish Extrusions
A-SPX-TRAL-3



Back-bend Flexible Chain
A-SPX-CHSS

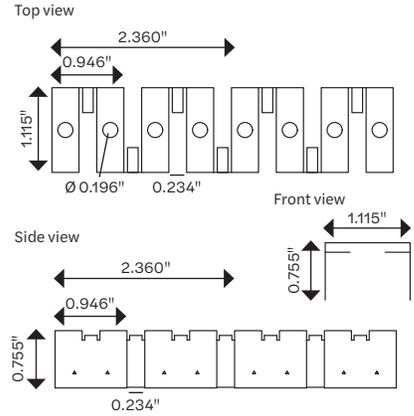


End Caps*



Silicone end cap
A-SXHW-ECSI

* End cap quantities are available upon request.





Silicone insert, single color
X-C-SX-S11C

Silicone insert, RGB
X-C-SX-S13C



Silicone glue
A-SWFX-SA

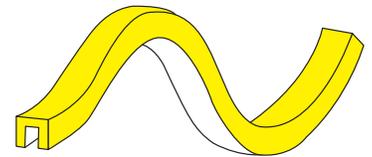

Types of Feed

