

# STREET WRAP™ FLEX SIDE-BEND

24  
VDC




FLEX

Flexible LED illumination

## Specifications

Dimensions L x W x H ..... 24-ft and custom lengths available  
 Input ..... 24 V  
 Min. bend radius ..... 2.36"  
 Power ..... 3.66 W/ft.  
 Operating temp. .... -40° C to +65° C  
 Environment ..... IP67  
 Power supply ..... Principal Sloan 24V  
 Run footage ..... Max. 24 ft.  
 Applications ..... Neon tube light source, building and sign outline lighting and cover lighting, indoor/outdoor, cursive letters and design  
 Warranty ..... 5-year Product/5-year Labor

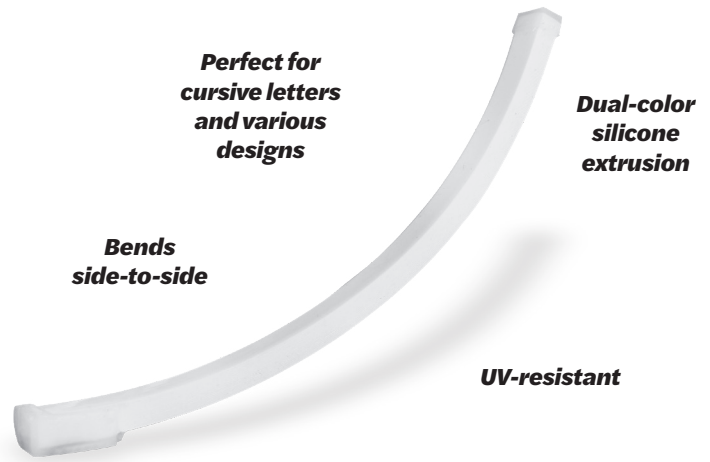


## Product Options




CCT/color	Jacket color	Lm/ft	Cut section length	Max. length/ 96 W PS	W/max. length	SKU
6500 K	White	107	3.9370"	287.4016"	87.7	M-SV024-65
5000 K						M-SV024-50
4000 K						M-SV024-40
Red (623 nm)	Red	46				M-SV024-RD
Orange (609 nm)	Orange	37				M-SV024-OR
Yellow (590 nm)	Yellow	51				M-SV024-YL
Green (525 nm)	Green	85				M-SV024-GR
Blue (468 nm)	Blue	23				M-SV024-BL
Cyan	White	16				3.2795"
Pink		9	86.7	M-SV024-PK		
RGB		N/A	87.7	M-SV024-3C		

## Wiring

Single color product

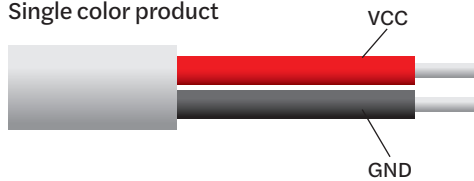

RGB product

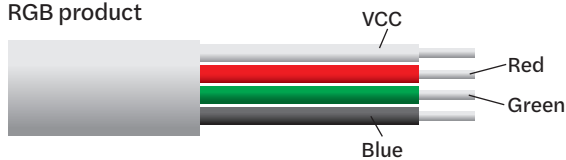

### IMPORTANT WARRANTY INFO

**This warranty is void if any cuts are made in the field.**

**Any cuts must be made by Principal Sloan to maintain warranty.**

**NOTE:** The LED neon itself and all its components may not be mechanically stressed. Please ensure that the power supply is adequate to operate the total load. Only qualified personnel should be allowed to perform installations. The design of the housing should be according to the IP standards in the application. If surge protection structure not within power supplier, a lightning protector should be needed additionally. Before cutting and sealing, please read the user manual, and please ensure you have read and fully understand it. Please do not twist the product and do not bend it in wrong direction, see Figure 2 for a correct demonstration.

# STREET WRAP™ FLEX SIDE-BEND


Flexible LED illumination

24  
VDC




FLEX

## Accessories




**Transparent PC clips\***  
A-SVMH-CLPL

\* Transparent clips are not warranted if used in outdoor applications.




**3.28-ft & 8-ft Aluminum mill finish extrusion for outdoor applications**

A-SVMH-TRAL



**Aluminum mill finish clips for outdoor applications**

A-SVMH-CLAL

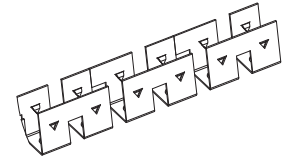

**Stainless steel chain for curve installation**


A-SVMH-CHSS

## End Caps\*



**Silicone end cap**  
A-SVHW-ECSI


\* End cap quantities are available upon request.




**Silicone insert, single color**  
X-C-SV-SI1C



**Silicone glue**  
A-SWFX-SA



**Silicone insert, RGB**  
X-C-SV-SI3C

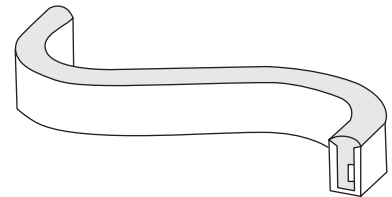


## Types of Feed




Bottom feed right

Top view




Bottom feed right

Front view




Bottom feed left

Top view

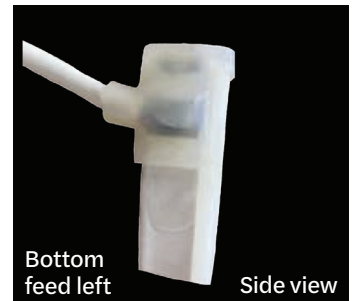


Bottom feed left

Side view



End feed

Top view



End feed

Side view

principalsloan.com  
325.227.4577  
3490 Venture Dr., San Angelo, TX 76905

