

HanleyLED

# SUPERIOR 60 W, 12 VDC POWER SUPPLY (277-347VAC)



Superior Series

## Specifications

SKU.....H60W-PPS734712V  
Warranty.....10-year product/5-year limited labor


### Performance

Input voltage.....277~347 VAC  
Input current.....0.28A/277 VAC | 0.22A/347 VAC  
Input frequency.....50~60 Hz  
Efficiency.....≥ 86% (347 VAC)  
Power factor.....≥ 0.96 (277VAC)  
Power input.....0.28 A max.  
Output voltage.....DC 12V ±2.5%  
Output current.....5 A  
Output power.....60 W

### Safety

Protective characteristics..... Over-current/short-circuit/  
over-voltage/over-temperature  
Safety rating.....IP68, Class 2  
Dielectric Strength (Hi-Pot) .... I/P-O/P 3.75KVac/10mA/3S  
I/P-Case 1.8KVac/10mA/3S  
Insulation Resistance.....100MOhm Max/500Vdc/3S  
Grounding Resistance.....100mOhm  
EMC.....FCC part 15 class B

High performance superior  
power supply

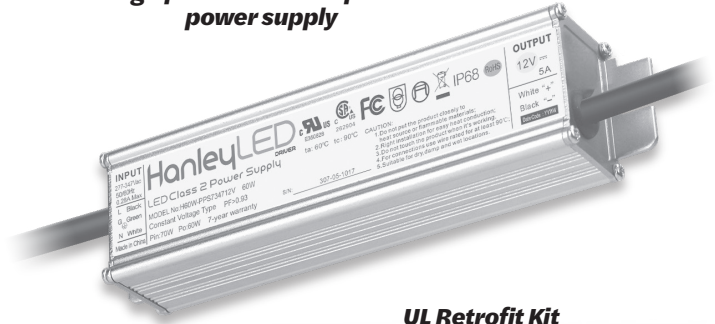


UL Retrofit Kit  
Classified

### Environmental

Operating temperature.....-40°~+60° C  
Storage temperature.....-40°~+80° C  
Relative humidity.....20~95% RH, non-cond.  
Vibration.....10 ~ 500HZ, 5G, 30 minutes  
(for X, Y, Z each axis)



## Dimensions

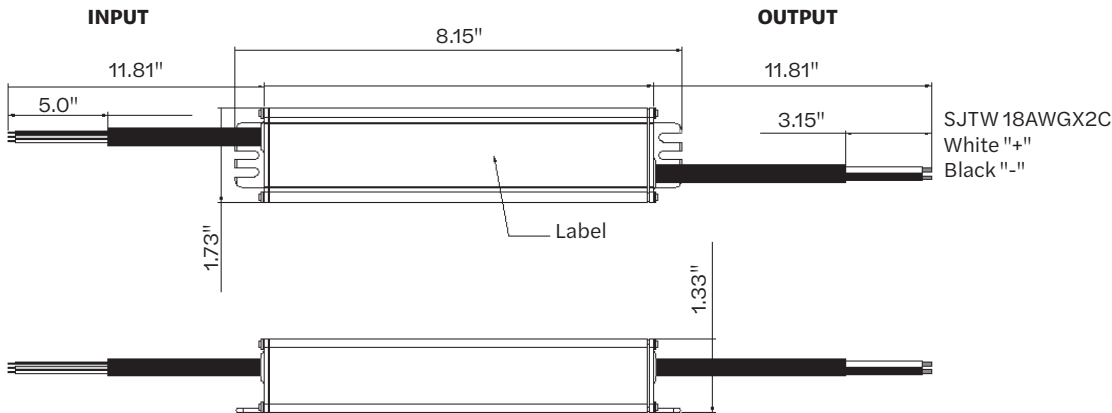

SJTW 18AWGX3C  
Black "L"  
White "N"  
Green "E"

Specifications subject to change without notice.




HanleyLED

# SUPERIOR 60 W, 12 VDC POWER SUPPLY (277-347VAC)



Superior Series

## Spacing Between Power Supplies

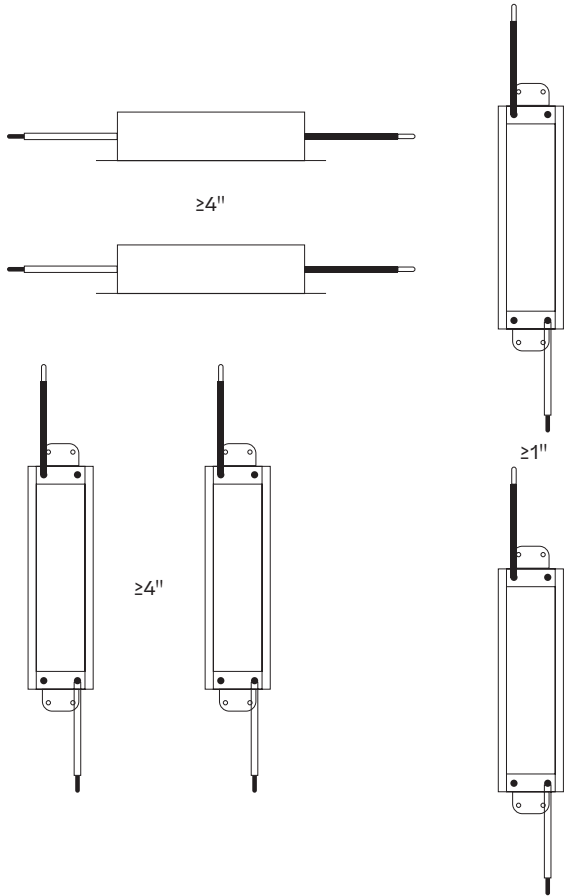

- Ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.
- Ensure the power supply position has sufficient airflow.
- Operating temperature must be between -40° C to +60° C.
- Do not overload the power supply with multiple appliances.
- Power supply operates at high temperature.  
To avoid injury, do not touch while in use.
- Do not install with power connected or during an electrical disturbance.
- Do not attempt to install by yourself.  
Please contact the supplier with any questions.
- Please read and follow the instructions carefully before installing.  
Ensure all contact points are in good working order.
- Please pay attention to the environment, and check for any unsafe conditions.

UL 48 Standard requires spacing between LED power supplies shall be at least 1 inch from end to end and 4 inches from side to side. This is to ensure adequate heat dissipation. Greater spacing may be required when heat ventilation in the sign or power supply enclosure is not adequate.

### Recommended drivers per enclosure:

- 60 W = 2 max
- 100 W = 1 max
- 96 W = 1 max
- 120 W = 1 max
- 150 W = 1 max
- 180 W = 1 max
- 192 W = 1 max
- 240 W = 1 max

principalsloan.com  
325.227.4577  
3490 Venture Dr., San Angelo, TX 76905

