


# TAP OUT MOD™

## M-SFTO3-XX

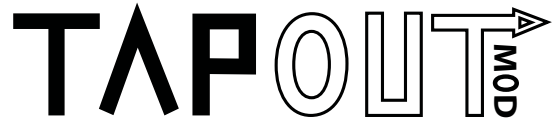

### TAP OUT MODULE OPTIONS

CCT / WAVELENGTH	SKU	Efficacy	Intensity	UL Part Number
5000K	M-SFTO3-50	95 LM/W	125 LM/mod (275 LM/ft.)	PL-OP2-TO3-P-NW
7000K	M-SFTO3-70	105 LM/W	139 LM/mod (305 LM/ft.)	PL-OP2-TO3-P-TW



### SPECIFICATIONS

Beam Angle	160° Low Dome, Batwing Optic	Packaging	Per Bag	90 Mods (41ft.)
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs		Per Case	900 Mods (409ft.)
Dimensions	0.72"W x 3.15"L x 0.3"H	Bag Color	Green	7000K
Mounting Options	Peel & Stick, Mechanical Screw Hole		Grey	5000K
Input	12V	Power		1.32 W/Mods (2.9 W/ft.)
Operating Temp	-40° to +60°C	Max Mods per Power Supply		45
Wire Color	+ White Solid & - White/Black Stripe	Power Supply		PLED 12V
Max Mods in Series	22 Mods (10ft.)	Mods per Foot		2.2
		Module on Center Spacing		5.45"

### RECOMMENDED COVERAGE CHART

Depth	Max Stroke	Row Spacing
		Single Row
6"	14"	12"
7"	16"	16"
8"	16"	16"
9-12"	18"	18"

Note: Product and depth may vary depending on face material and desired brightness.

