


24V TAP OUT MOD HE™

M-SFTO3-65-24



24V TAP OUT HE

CCT	CRI	SKU	Efficacy	Intensity	UL Part Number
6500K	>81	M-SFTO3-65-24	140.15 LM/W	185 LM/mod (244 LM/ft.)	PL-SF24-TO3-P

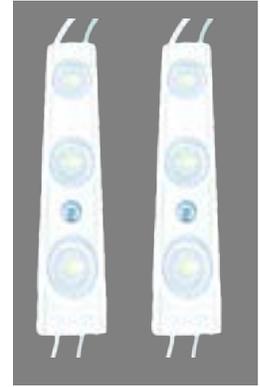

SPECIFICATIONS

Beam Angle	160° Low Dome, Batwing Optic	Packaging	Per Bag	72 Mods (54.55ft.)
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs		Per Case	1152 Mods (872.73ft.)
Dimensions	3.14"L x 0.72"W x 0.30"H	Bag Color	Green	
Mounting Options	Peel & Stick, Mechanical Screw Hole	Power	1.32 W/Mods (1.74 W/ft.)	
Input	24V	Max Mods per Power Supply	72	
Operating Temp	-40° to +60°C	Power Supply	PLED 24V	
Wire Color	+ White Solid & - Gray Solid	Mods per Foot	1.32	
Max Mods in Series	24 Mods (18.18ft.)	Module on Center Spacing	9.09"	

RECOMMENDED COVERAGE CHART (CHANNEL LETTERS)

Depth	Max Stroke	Multi-Row O.C. Spacing
5"	12"	10" (Up to 24" Stroke)
6"	14"	12" (Up to 24" Stroke)
7"	16"	9"
8" +	18"	12"

Note: Product and depth may vary depending on face material and desired brightness.

RECOMMENDED COVERAGE CHART (CABINETS)

Depth	Max Stroke	Multi-Row O.C. Spacing
7"	16"	9"
8" +	18"	12"

Note: Product and depth may vary depending on face material and desired brightness.

