

UNIVERSAL 100W 24VDC MICRO-DRIVER POWER SUPPLY

Specifications

SKU P-OH100-24-MD
Warranty 10-year product/5-year limited labor

Performance


Input voltage 100~277 VAC
Input current 0.9 @ 120VAC, 0.39 @ 277VAC
Input frequency 50~60 Hz
Power factor 0.9 min.
Output voltage DC24V
Output current 0-4.0 A
Output power 100 W max.

Safety

Over current protection >100%
Short circuit protection Hiccup mode, auto-recover
Other protection Over-voltage/over-load/short circuit
UL UL879 / UL8750
CSA C22.2 NO. 207-M89
CE-LVD EN61347-1:2008+A1:2011+A2:2013
EN61347-2-13:2014



**Aluminum shell,
silicone potted**

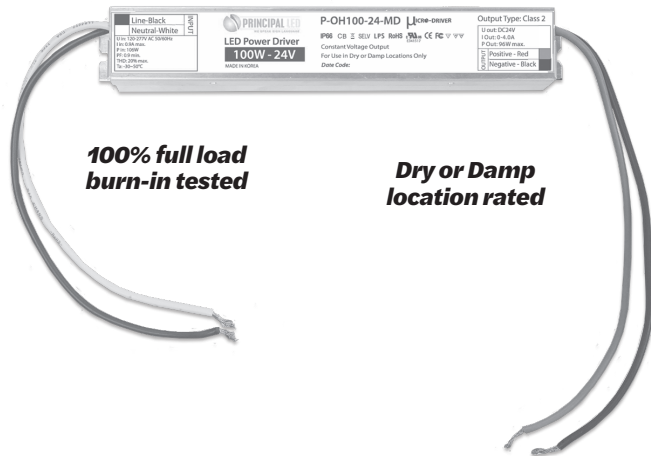

Physical

Length 6.8"
Width 1.1"
Height 0.8"
Mounting length 6.9"
Weight 0.37 lbs.
Lead lengths 7.9"

Environmental

CE-EMC EN55015, EN61527, EN61000
FCC FCC 47 CFR PART 15, CLASS 2
IP rating IP66
Operating temperature -30°~+50° C
Storage temperature -40°~+80° C
Relative humidity 20~95% RH



principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905