

UNIVERSAL 60W 12VDC MICRO-DRIVER POWER SUPPLY

Specifications

SKU P-OH060-12-MD
Warranty 5-year product/5-year limited labor

Performance

Input voltage 100~277 VAC
Input current 0.7 A max.
Input frequency 50~60 Hz
Power factor 0.9 min.
Output voltage DC12V
Output current 0-5.0 A
Output power 60 W max.

Safety


Over current protection 110~120%
Short circuit protection Hiccup mode, auto-recover
Other protection Over-voltage/over-load/short circuit
UL UL879 / UL8750
CE-LVD EN61347-1:2008+A1:2011+A2:2013
EN61347-2-13:2014



principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

© 2025 Principal Industries Rev A 2025-03-10

**Aluminum shell,
silicone potted**

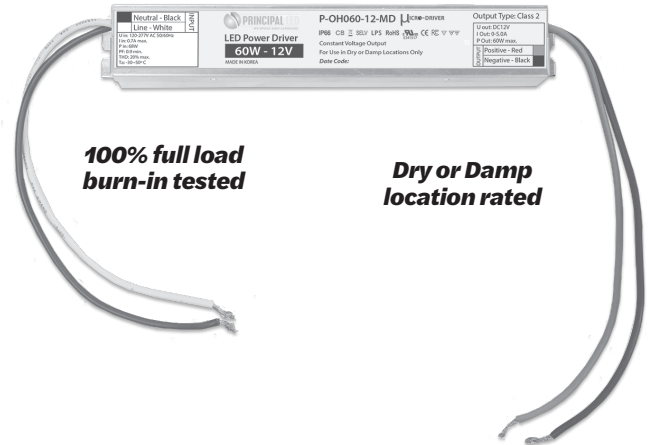

Physical

Length 6.8"
Width 1.1"
Height 0.8"
Mounting length 6.9"
Weight 0.37 lbs.
Lead lengths 7.9"

Environmental

CE-EMC EN55015, EN61527, EN61000
FCC FCC 47 CFR PART 15, CLASS 2
IP rating IP66
Operating temperature -30°~+50° C
Storage temperature -40°~+80° C
Relative humidity 10~90% RH

Specifications subject to change without notice.

