


Universal 60W Micro Driver Power Supply

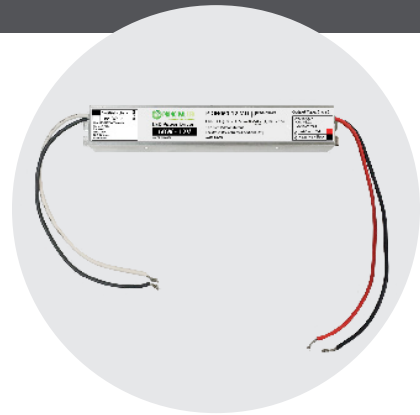

PART

Part Number

P-OH060-12-MD

PERFORMANCE

Input Voltage 100~277 VAC

Input Current 0.7A max.

Input Frequency 50/60 Hz

Power Factor 0.9 min.

Output Voltage DC12V

Output Current 0-5.0A

Output Power 60W Max.

PHYSICAL

Length 6.8 in. (174.8 mm)

Width 1.1 in. (27.5 mm)

Height 0.8 in. (20.2 mm)

Mounting Length 6.9 in. (175.26 mm)

Weight 0.37 lbs. (170 grams)

Lead Lengths 7.9 in (177.8 mm)

FEATURES

- Universal input voltage 100 ~ 277 VAC
- Aluminum shell, silicone potted
- 100% full load burn-in tested
- Dry or Damp Locations Rated

SAFETY

Over Current Protection 110~120%

Short Circuit Protection Hiccup mode, auto recover

Other Protection Over Voltage/Over Load/Short Circuit

UL UL879 / UL8750

CE-LVD EN61347-1:2008+A1:2011+A2:2013
EN61347-2-13:2014

ENVIRONMENTAL

CE-EMC EN55015, EN61527, EN61000

FCC FCC 47 CFR PART 15, CLASS 2

IP Rating IP66

Operating Temperature -30°C to 50°C (-22°F to 122°F)

Storage Temperature -40°C to 80°C (-40°F to 176°F)

Relative Humidity 10-90% RH

ORDERING GUIDE

P	O	H	060	12	MD
Power Supplies	Outdoor, Direct-wire	100-277 VAC	Max. 60W	12VDC Output	Principal LED Micro Driver




www.p-led.com • 325-227-4577 • sales@p-led.com



REV20220406
Data subject to changes.

DIMENSIONS (INCHES):

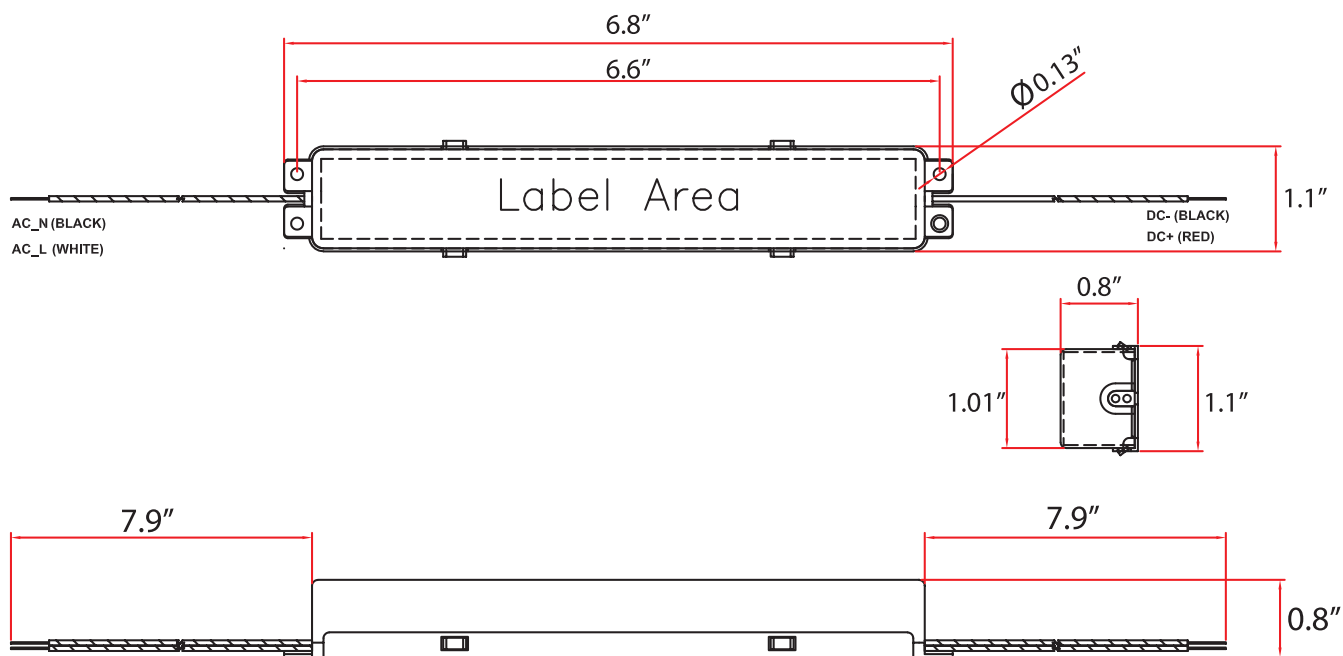

- www.p-led.com
- (325) 227-4577
- 3490 Venture Drive, San Angelo, Texas 76905
- info@p-led.com