

UNIVERSAL DIMMING CONTROLLER

Manual dimming control for 0-10 V dimmable SloanLED power supplies

Specifications

SKU 701666

Dimensions L x W x H 1.50" x 1.50" x 0.85"

Input range 12-24 VDC, Class 2

Power 0.024 W max.

Current 1 mA max.

Operating temperature -40°~+60° C

Housing Plastic body

Body color Black

Dimming method PWM dimming

Connectors 18 AWG

IP rating IP67



**Compatible with dimmable
12 VDC and 24 VDC
power supplies**

**Multiple
mounting options
for total control**

**Reverse polarity
protection**

**IP67-rated for
safe outdoor use**




**Up to ten (10) power supplies
on a single controller**

Compatibility

SKU		Power output
12 VDC	60C3D 60 W (701507-60C3D)	60 W
24 VDC	24S2D 100 W (701895-24S2D)	100 W

Connection

- Connect SloanLED power supply and Universal Dimming Controller:
Purple-to-Purple (DIM+); GRAY/PINK/YELLOW-to-GRAY (DIM-)
- Connect SloanLED power supply and LED product:
RED (+) to RED; BLACK (-) to BLACK
- Connect SloanLED power supply to 120-277 VAC

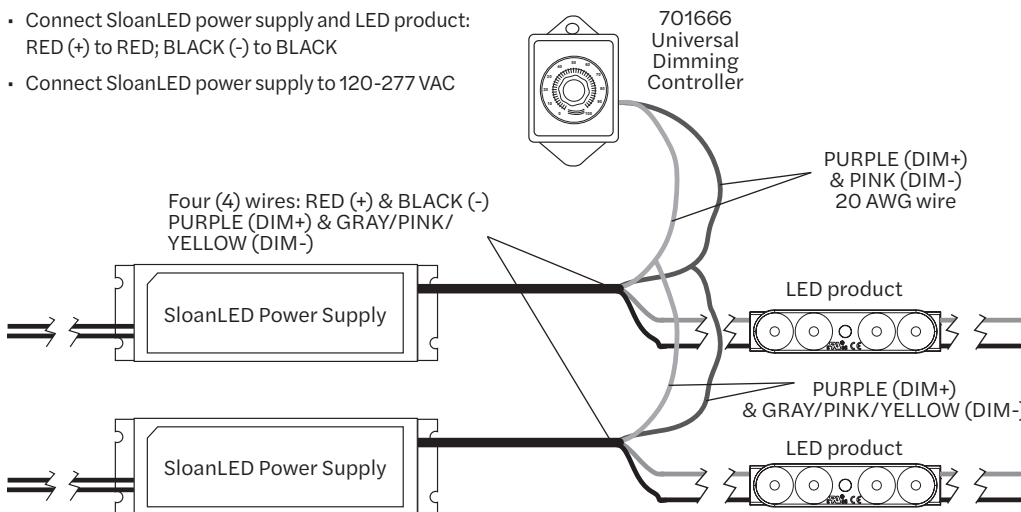

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905