

HanleyLED

WINGSPAN SINGLE-SIDED

Extreme brightness solution for illuminating custom-built single-sided cabinets and pylon signs

24
VDC



Wingspan Series

Specifications

- SKU HLED-WS3360W24
- Beam angle 175°
- Power (W) 3 W/mod (customizable W/ft)
- Color temperature 7000 K
- Efficacy 165 lm/W
- Lumens 495 lm/mod (customizable lm/ft)
- Modules/ft 0.6/ft fully-stretched
(customizable up to 1 mod every 2 ft)
- Environment IP67
- Operating temp. -25° C to +60° C
- Storage temp. -40° C to +70° C
- Cascade 20 mods single-ended power feed
40 mods double-ended power feed
- Packaging Anti-static bag, 20 modules (33.3 ft)/bag
- Warranty 10-Year Product/5-Year Limited Labor



Ideal for single-sided cabinets and pylon signs

Spacing Chart


Depth	MAX row spacing
5"	13"
6"	18"
7"	22"
8"	24"
9"	28"
10-15"	30"




Power Supply Options

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	150 W, 24V	192 W, 24V	240 W, 24V	288 W, 24V
Wingspan Single-sided	11 mods	20 mods	32 mods	33 mods	50 mods	64 mods	80 mods	96 mods

Dimensions

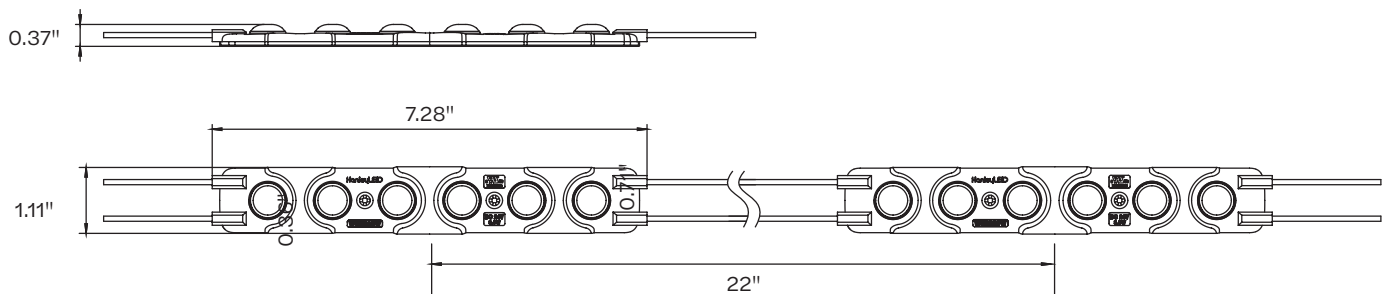

Light Distribution

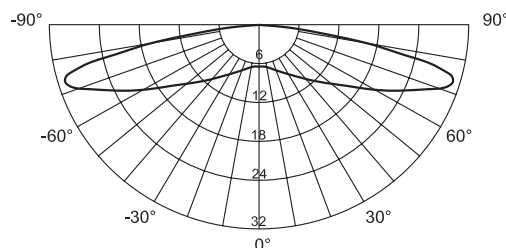

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

