


# LEDSTRIPE 24V

Large-profile LED tubing

24  
VDC

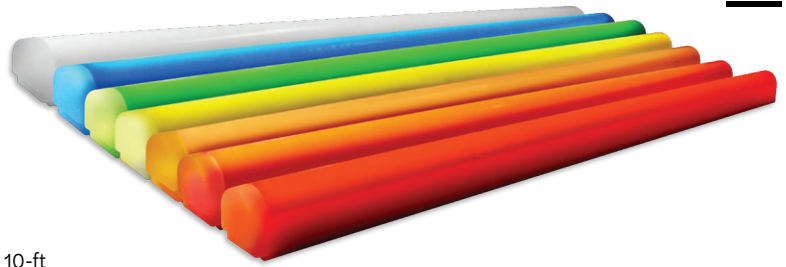

## Specifications

- Dimensions** ..... Width .....1.00"  
 Height.....1.68"  
 Lengths.....1-ft\*; 2-ft; 4-ft; 6-ft; 8-ft; 10-ft
- Factory bends** ..... 12" radius (radial and flat bend)
- In-field bends**..... Radial bend .....14 ft  
 Flat bend .....19 ft
- Operating temperature** ..... -40° C to +70° C
- Protection class** ..... IP66
- Binning** ..... MacAdam Ellipse 3-Step†
- Power per foot** ..... 1.5 W (except 1-ft piece at 3.0 W on average)
- Power capacity** ..... 60 ft per 100 W 24 VDC power supply
- Colors** ..... Red, Orange, Amber, True Yellow, Green, Blue, White (6500 K), Lemon Yellow

Color	Lumens per ft
Red	21.94
Orange	5.95
Amber	9.84
True Yellow	84.00
Green	19.92
Blue	9.60
White (6500 K)	118.08
Lemon Yellow	86.40

Item description	Approx. cut increments	Actual length
1-ft Tube*	1"	13.0"
2-ft Tube	3"	25.0"
4-ft Tube		49.0"
6-ft Tube		73.5"
8-ft Tube		97.5"
10-ft Tube		121.5"

\* U.S. and Canada only.

† White (701189E-W-X), True Yellow (701189-YT-X), and Lemon Yellow (701189E-WY-X) only.



LEDStripe 24V is covered by US and foreign patents pending and covered by the following US patents issued: 6,776,504, 6,969,179, and 7,192,157

## Ordering information‡

Color	Part number	Color	Part number
Red	701189-XH	Green	701189D-G-X
Orange	701189-A-XD	Blue	701189A-B-XD
Amber	701189-Y-XD	White	701189E-W-X
True Yellow	701189-YT-X	Lemon Yellow§	701189E-WY-X

‡ "X" in part number denotes length (1-ft\*; 2-ft; 4-ft; 6-ft; 8-ft; or 10-ft).

§ Lemon Yellow illuminates lighter than its daytime color. Lemon Yellow daytime color is Amber.

## Unlit product color chart

Red PANTONE 1797 C	Orange PANTONE 1665 C	Amber PANTONE 2012 C	True Yellow PANTONE 7405 C
Green PANTONE 355 C	Blue PANTONE 2935 C	Lemon Yellow PANTONE 138 C	

## Power Supply Options

24 VDC power supply	LEDStripe 24V, all colors¶
60 W	36 ft
96 W	Two legs 30 ft each <sup>Δ</sup>
3 x 96 W	3 x two legs 30 ft each <sup>Δ</sup>
100 W	Two legs 30 ft each <sup>Δ</sup>
Watts per assembly	1.5 W per ft

¶ Footages expressed are total (maximum 30 ft per leg). Power Output is based on Power Supply loading of two parallel 30 ft legs. Actual power draw may depend on loading configuration.

Δ If more than two parallel legs are used, check output voltage and current of power supply: Current ≤ 4.0 A, Voltage ≥ 23.3 VDC.




**NOTE:** When mixing different sizes/colors or various products on the same power supply, simply add all the power requirements for the respective footages of each product. Then choose appropriate power supplies to provide adequate power output. The actual number of power supplies needed may vary based on how the materials are distributed across the project.

# LEDSTRIPE 24V




Large-profile LED tubing

24  
VDC

## Accessories

Accessory	Part number	Description
<b>Joint and corner covers</b>		
	701361-X    701362-X    701363-X    701364-X	
		
Joint cover	701361-X	"X" in part number denotes color
Outside corner	701362-X	
Inside corner	701363-X	
Step corner	701364-X	
<b>Cables and connectors</b>		
	701158-120 & 701158-180    701385    701160-3    701187-DC    701188-DC	
		
Hook-up cable, 10-ft	701158-120	Connects LEDStripe 24V to power supply
Hook-up cable, 15-ft	701158-180	
Jumper kit	701385	For routing around field-cut sections
Y connector	701160-3	Three-way connector for joining two sections to one
Wiring pigtail, large connector	701187-DC	Male, outdoor-rated connector
Wiring pigtail, small connector	701188-DC	Female, outdoor-rated connector
<b>Mounting</b>		
	400775    701156    400828-FC    701491	
		
Mounting button	701156	Circular button for standard installation
Mounting clip	400775	Square clip with flanged end
Acrylic end cap	400828-FC	For adjusting product length
Field end cap installation kit	701491	Glue, PCB sealer, de-burr sandpaper, instructions



 principalsloan.com  
 325.227.4577  
 3490 Venture Dr., San Angelo, TX 76905

© 2023 Principal Industries Rev B 2023-08-30

Specifications subject to change without notice.

