

HanleyLED NRG 3

12
VDC


NRG
S E R I E S

12V LED illumination for small channel letters

Specifications

SKU.....	HLED-PE-3
Beam angle.....	170° Phoenix wing optics
Power (W).....	1 W/mod (1.5 W/ft)
Color temperature.....	7000 K
Efficacy.....	170 lm/W
Lumens.....	170 lm/mod (255 lm/ft)
Modules/ft.....	1.5/ft (fully-stretched)
Environment.....	IP65 waterproof
Operating temp.....	-40° C to +60° C
Storage temp.....	-40° C to +70° C
Cascade.....	25 mods single-ended power feed 50 mods double-ended power feed
Packaging.....	Anti-static bag, 75 modules (50 ft)/bag, 5 bags/inner carton, 10 bags/outer carton
Warranty.....	10-Year Product/5-Year Limited Labor


**Exceptionally Efficient:
25% Less Power Draw –
Exceptionally Bright: 25%
Brighter Output**

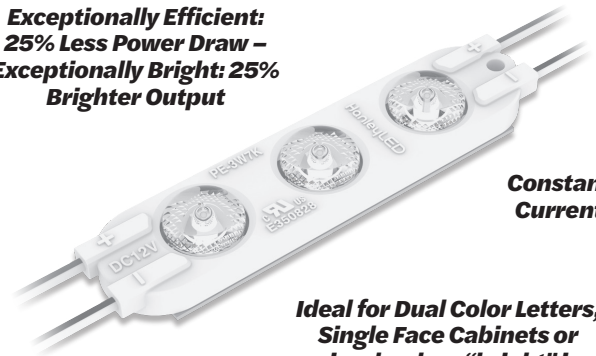

**Constant
Current**

**Ideal for Dual Color Letters,
Single Face Cabinets or
simply when “bright” is
what you need**


Light Distribution

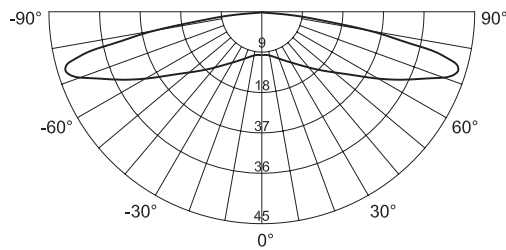

Power Supply Options

Product	35 W	60 W	100 W	120 W	150 W	180 W	240 W
NRG 3	35 mods	60 mods	100 mods	120 mods	150 mods	180 mods	240 mods

Dimensions

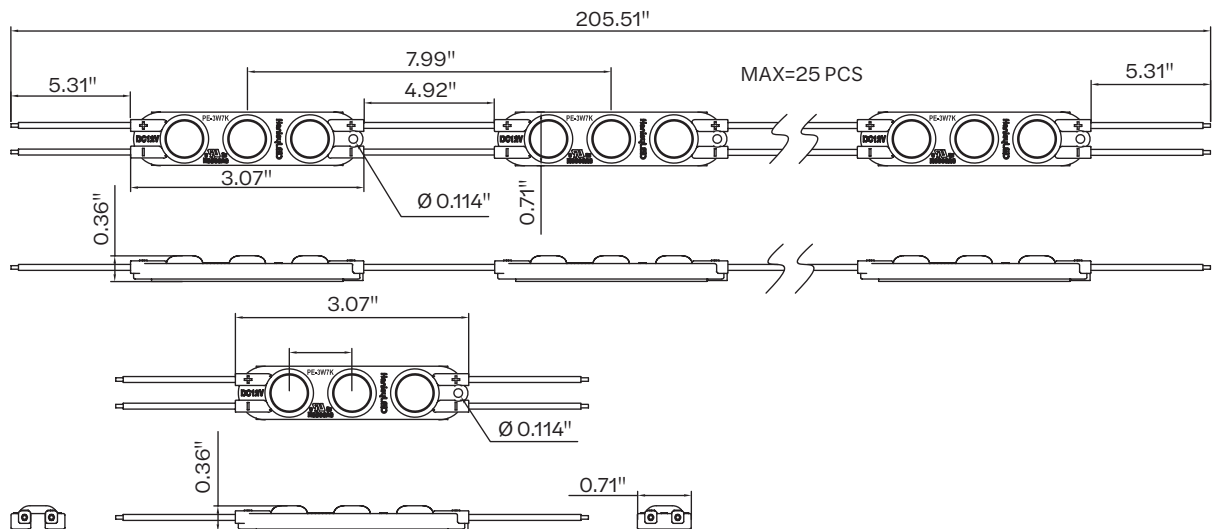

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

