


# STREET FIGHTER™ CHOICE 12 VDC

12V LED channel letter illumination



## Specifications

<b>SKU</b> .....	Choice .....	K-OH06012-S
	Choice HO .....	K-OH06012-H
<b>UL part number</b> .....	Choice .....	PL-SF-CH-P
	Choice HO .....	PL-SF-HO-P
<b>Dimensions L x W x H</b> .....	Choice .....	1.4" x 0.69" x 0.25"
	Choice HO .....	2.2" x 0.69" x 0.25"
<b>Beam angle</b> .....	170° Diamondback Optic Lens Technology	
<b>Module on-center spacing</b> .....	Choice .....	7.5" (1.6 mods/ft)
	Choice HO .....	7.8" (1.53 mods/ft)
<b>Color temperature</b> .....	7000 K	
<b>Intensity</b> .....	Choice .....	94 lm/mod (150 lm/ft)
	Choice HO .....	147 lm/mod (225 lm/ft)
<b>Efficacy</b> .....	118 lm/W	
<b>Mounting options</b> .....	Peel-N-Stick and mechanical	
<b>Operating temp.</b> .....	-40° C to +60° C	
<b>Environment</b> .....	IP68	
<b>Power supply</b> .....	12 VDC	
<b>Max. mods in series</b> .....	Choice .....	36 mods (22.5 ft)
	Choice HO .....	24 mods (16.69 ft)
<b>Max. mods per power supply</b> ..	Choice .....	72
	Choice HO .....	48
<b>Wire color</b> .....	White/Red (+), White/Black(-)	
<b>Power (W)</b> .....	Choice .....	0.8 W/mod (1.28 W/ft)
	Choice HO .....	1.25 W/mod (1.91 W/ft)
<b>Packaging</b> .....	Choice .....	Mods per bag: 72 (45 ft)
		Mods per case: 1584 mods (990 ft)
	Choice HO .....	Mods per bag: 48 mods (31.37 ft)
		Mods per case: 1248 mods (815.69 ft)
<b>Bag color</b> .....	Blue	
<b>Warranty</b> .....	5-Year Product	

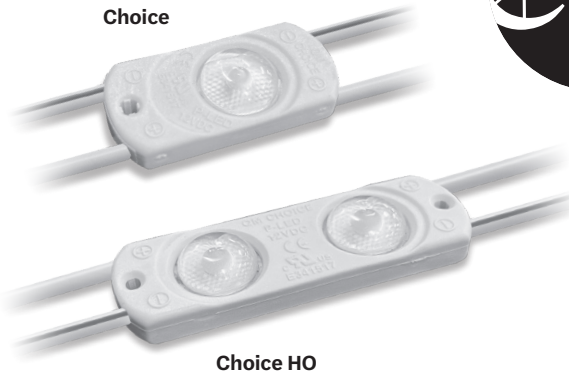

# FREE

## POWER SUPPLY

when you buy a bag of either  
12 V Choice or Choice HO

## Recommended coverage chart

Model	Depth	Mods/ft	Max stroke	Multi-row on-center spacing
Choice	2"	1.6	6"	2" @ 6 mods/ft
	3"		8"	4" @ 3 mods/ft
	4"		12"	7" @ 2 mods/ft
	5"		16"	10"
	6"		18"	
Choice HO	2"	1.6	6"	2" @ 6 mods/ft
	3"		8"	4" @ 3 mods/ft
	4"		12"	7" @ 2 mods/ft
	5"		16"	10"
	6"		18"	12"
	7"		22"	

Product and depth may vary depending on face material and desired brightness. All spacing guidelines in this chart were done using 7328 White Acrylic faces. Other materials, thicknesses, and color can affect these guidelines in your sign. To ensure accuracy, it is recommended that you test the product in your specific application in a dark setting prior to installation. If you have concerns or questions about the materials you are using for your application please contact us for assistance.



principalsloan.com  
325.227.4577  
3490 Venture Dr., San Angelo, TX 76905

