

STREET WRAP™ FLEX BACK-BEND RGB

Flexible LED illumination


24
VDC



Specifications

Dimensions L x W x H 24-ft and custom lengths available
Min. bend radius 2.36"
Power 3.66 W/ft.
Run footage Max. 24 ft.
Applications Neon tube light source, building and sign outline lighting and cover lighting, indoor/outdoor, cursive letters and design
Operating temp. -40° C to +65° C
IP rating IP67
Voltage 24 V
Power supply Principal Sloan 24V
Warranty 5-year Product/5-year Labor

* Custom colors will utilize white LEDs behind a color matched silicone over molding and the MOQ is 656,168 ft.

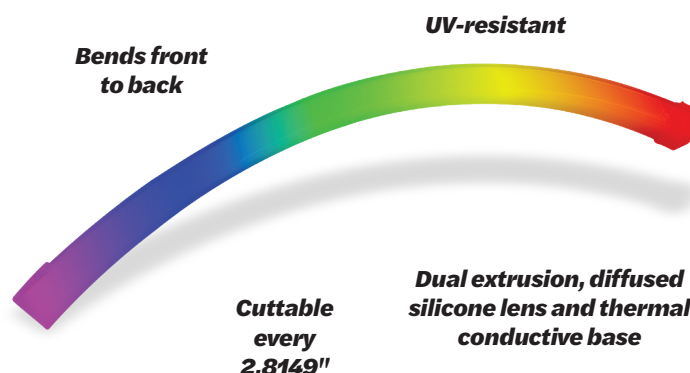

Product Options

CCT/color	Jacket color	Lm/ft	Cut section length	Max. length/ 96 W PS	W/max. length	SKU
RGB**	White	N/A	2.8110"	287.7244"	87.5	M-SX024-3C

**All RGB/ RGBW opportunities will only utilize Principal Sloan Superior Series Class 2 Power Supplies.

IMPORTANT WARRANTY INFO

This warranty is void if any cuts are made in the field.

Any cuts must be made by Principal Sloan to maintain warranty.

NOTE: The LED neon itself and all its components may not be mechanically stressed. Please ensure that the power supply is adequate to operate the total load. Only qualified personnel should be allowed to perform installations. The design of the housing should be according to the IP standards in the application. If surge protection structure not within power supplier, a lightning protector should be needed additionally. Before cutting and sealing, please read the user manual, and please ensure you have read and fully understand it. Please do not twist the product and do not bend it in wrong direction, see Figure 1 for a correct demonstration.


STREET WRAP™ FLEX BACK-BEND RGB

Flexible LED illumination

24
VDC





Accessories




Transparent PC clips*
A-SXMH-CLPL

* Transparent clips are not warranted if used in outdoor applications.



4-ft & 8-ft Aluminum mill finish extrusion for outdoor applications

4-ft: A-SXMH-TRAL-4
8-ft: A-SXMH-TRAL-8



Aluminum mill finish clips for outdoor applications
A-SXMH-CLAL




End Caps*



Silicone end cap
A-SXHW-ECSI

* End cap quantities are available upon request.





Silicone insert, single color
X-C-SX-SI1C

Silicone insert, RGB
X-C-SX-SI3C




Silicone glue
A-SWFX-SA

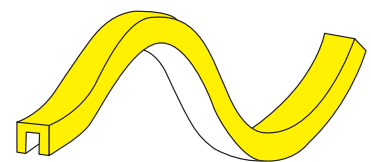



Wiring

RGB product

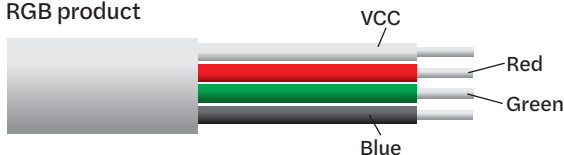

Types of Feed

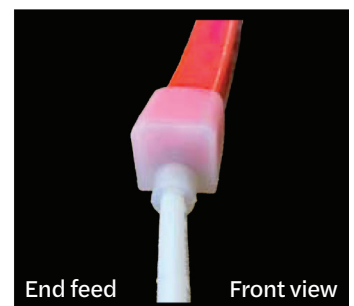

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

